

LUOYANG QIBR BEARING CO.,LTD.

Email:sales-support@qibr.com

Telephone:0086(0)379639 68877

Website: www.qibr.com

www.qibr.ru

www.qibr.es

Address:No.39,Taikang Road,LuoLong Zone,Luoyang City,China

QIBR HIGH PRECISION BALL BEARING

Rich Experienced and Professional Manufacturer

SINCE 2002




KEEP ROTATING, KEEP QUIET, KEEP MOVING



Luoyang bearing brand QIBR has risen in the Chinese market since its establishment in Luoyang in 2002.

QIBR focuses on producing high-standard, high-quality bearings. Until today, through the efforts of our best technical team and excellent sales team, our products have covered more than 50 countries and have been highly praised by our agents and customers.


The QIBR team will provide you with detailed technical advice and excellent after-sales service. We develop annual bearing production plans based on customers' needs, opinions and requirements, and continue to develop high-quality bearing products.

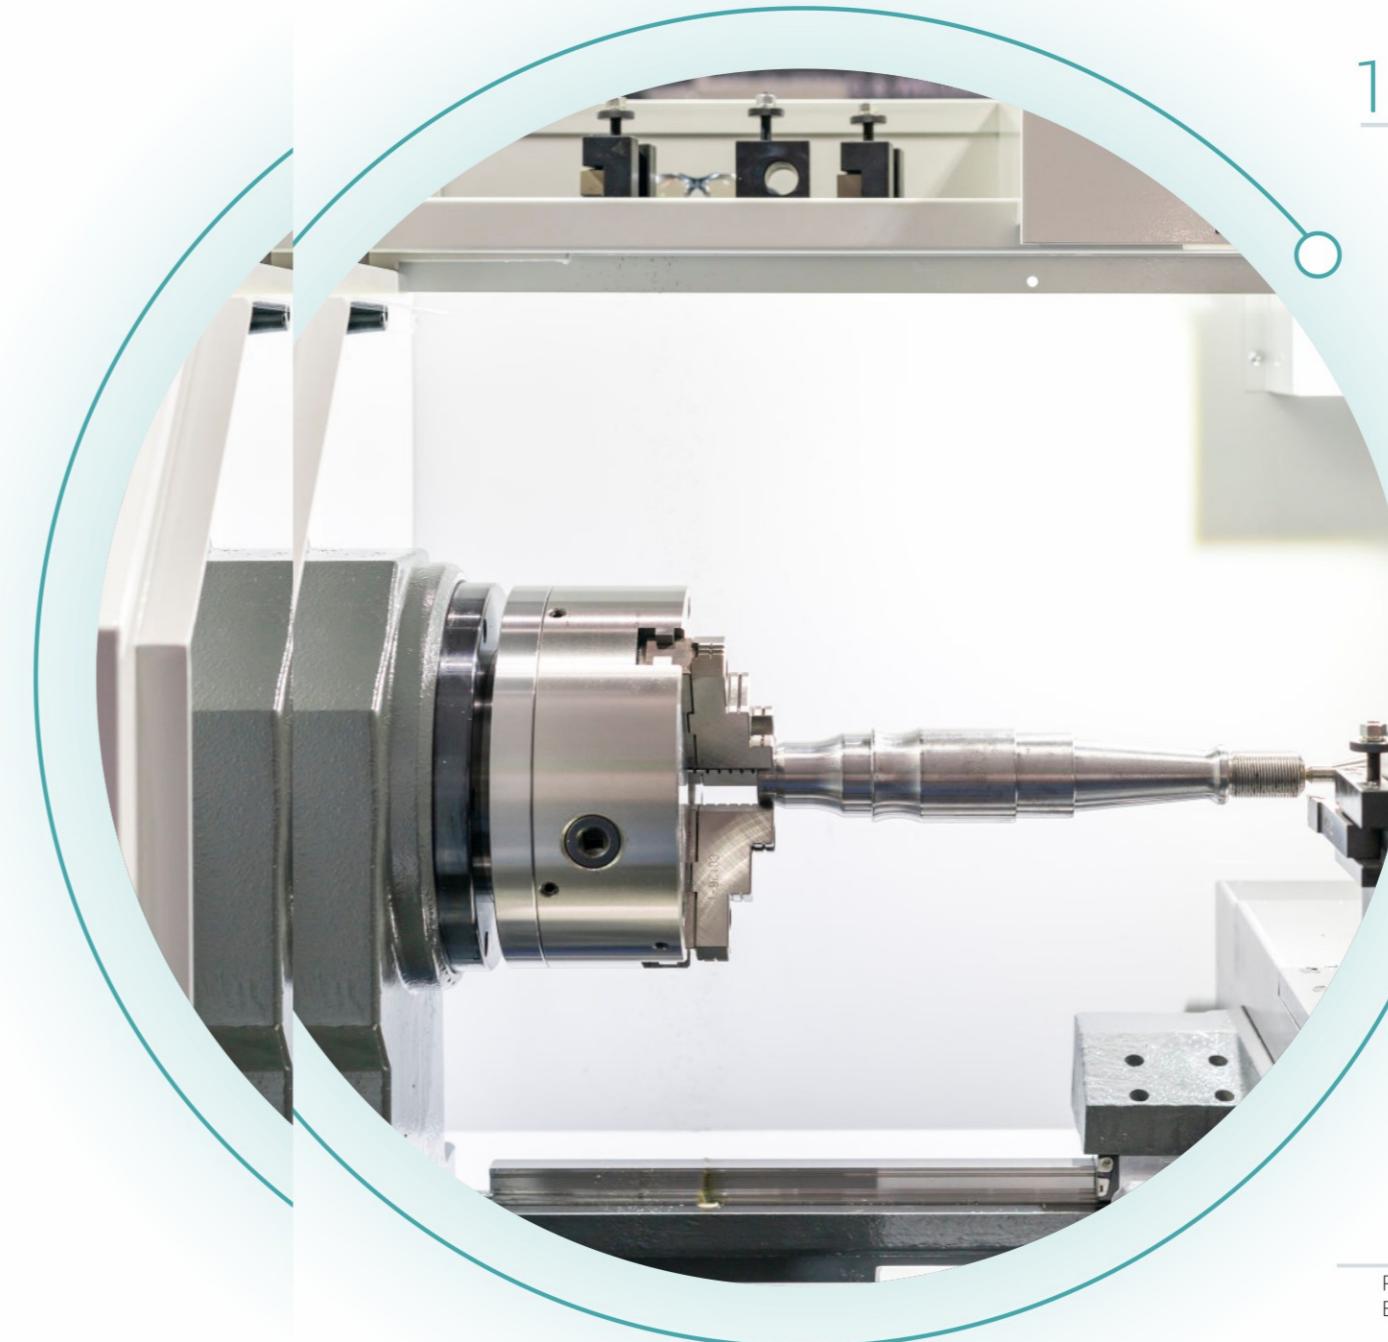

2002

Since

6000m²
Plant Area15 Persons
Engineers1000+
Customers from All Over the World100000+ Pcs
Annual Output of BearingsP2~P6
Bearing Accuracy Produced6mm~360mm
Bearing Diameter Range40 sets
Precision Production EquipmentOEM/ODM
Available58 Countries of Customers
23 Covered Sectors

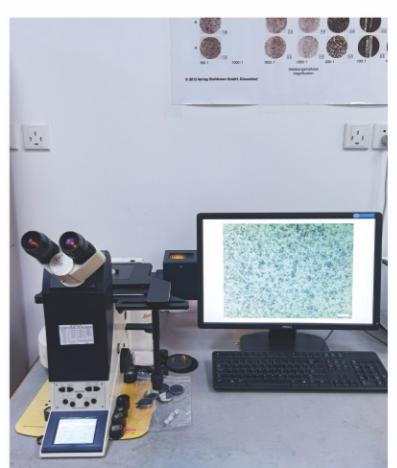


*Only part of the production equipment is shown;
If you need more information, you can visit our website or visit our factory.


*Only part of the production equipment is shown;
If you need more information, you can visit our website or visit our factory.



- HIGH LIMIT SPEED
- LOW FRICTION TORQUE
- HIGH ROTATIONAL PRECISION

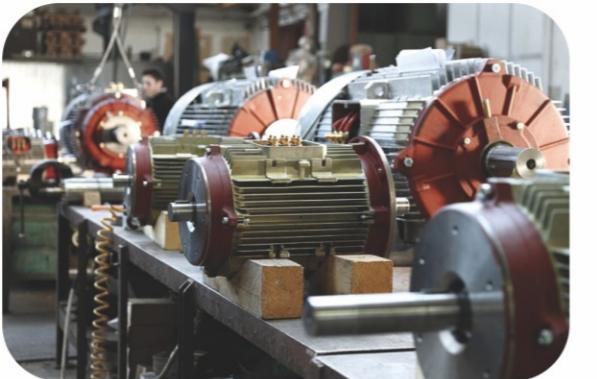


- HIGH LIMIT SPEED
- LOW FRICTION TORQUE
- LOW NOISE LEVEL

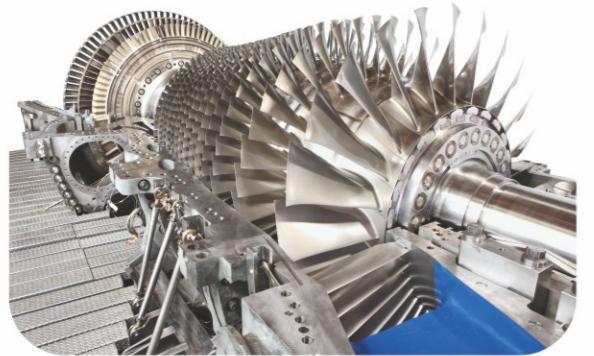

- HIGH LIMIT SPEED
- LESS HEAT PRODUCTION



- SPACE SAVING
- LOW FRICTION TORQUE

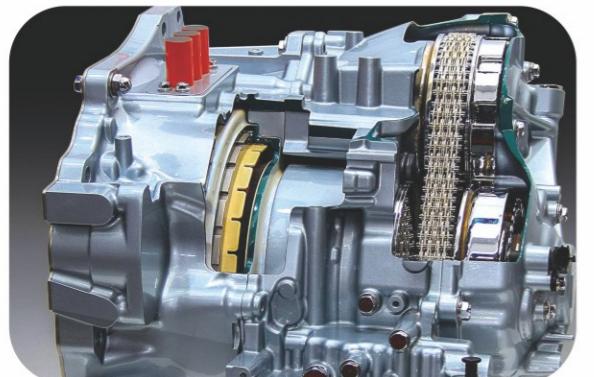

- HIGH LIMIT SPEED
- LOW FRICTION TORQUE



- LESS HEAT PRODUCTION
- LOW FRICTION TORQUE



KEEP ROTATING, KEEP QUIET, KEEP MOVING

Luoyang bearing brand QIBR has risen in the Chinese market since its establishment in Luoyang in 2002.

QIBR focuses on producing high-standard, high-quality bearings. Until today, through the efforts of our best technical team and excellent sales team, our products have covered more than 50 countries and have been highly praised by our agents and customers.

Four types of durable steel for high-precision bearings


High performance, long service life

1. High purity bearing steel ZGCr15 for high precision bearings

Bearing raw materials distributed in various sizes of inclusions can have a huge impact on the fatigue life of bearing. Typical inclusions in bearing steel are up to 100 microns in size and densely distributed. When the bearing is running, large inclusions will first cause fatigue cracks, which will lead to the destruction of the bearing material, causing the bearing to fail. QIBR bearings use domestic high purity steel ZGCr15 inclusions less than 20μm, fatigue strength of 600 to 800MPa or more, achieving long service life and conventional bearing steel compared to the life of bearings increased by 1.8 times.


2. High speed bearing steel HGCr15

QIBR high-speed series bearing material HGCr15, the smelting method is vacuum induction + vacuum self-consumption (double vacuum). The inclusions in the steel are less than 10μm. Compared with ZGCr15 steel, the purity is greatly improved, and the content of non-metallic inclusions is reduced. The fatigue strength reaches more than 600 to 800MPa, which can cope with higher and more complex stresses and achieve a long life of the bearing. And high reliability, the bearing fatigue life is increased by 3 times compared with traditional bearing steel.

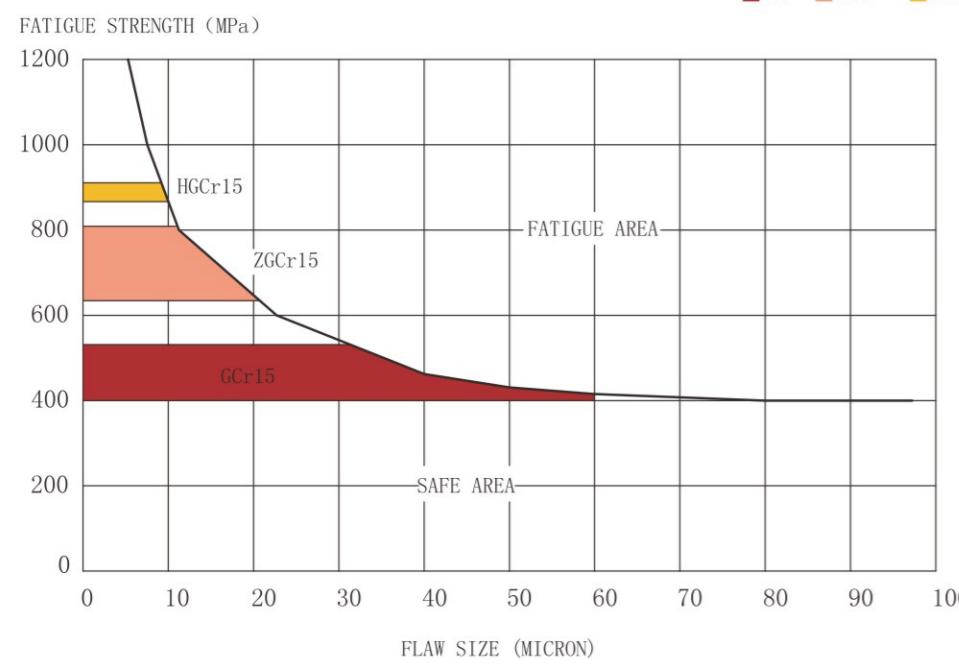

3. Ultra high speed bearing steel QBG42

QIBR ultra high speed series bearing material QBG42 is surface hardened heat-resistant bearing steel. Its smelting method is vacuum induction + vacuum self-consumption (double vacuum). It has high heat resistance, sintering resistance, high hardness, and high wear resistance; good fracture toughness and impact toughness. It can work stably below 300°C for a long time, and the bearing life can be extended by 4 times compared with ordinary bearing steel.

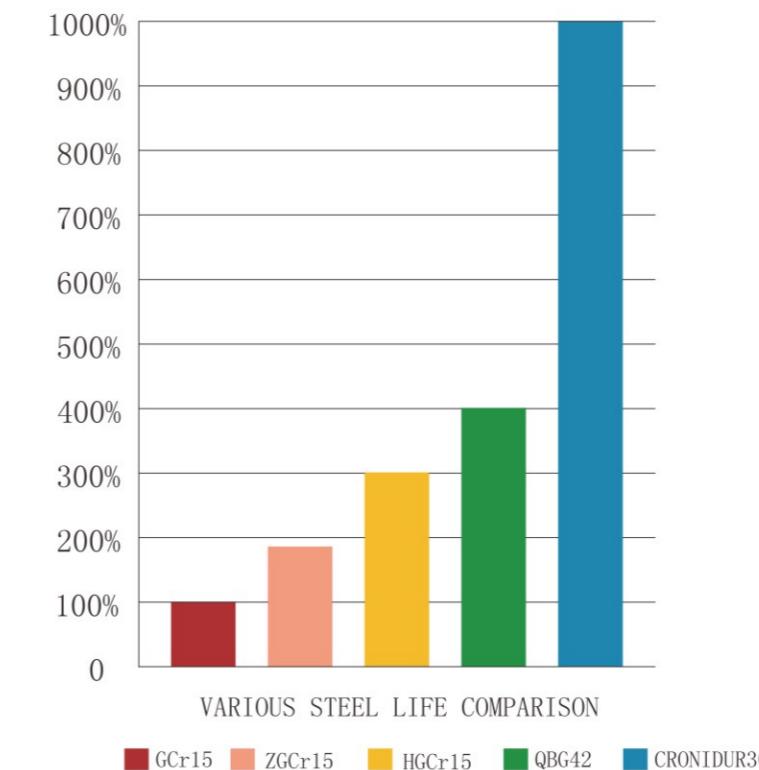

4. Super corrosion-resistant bearing steel Cronidur30


Cronidur30 is a martensitic stainless steel with high nitrogen content, high toughness and high strength. The steel is produced by PESR (high-pressure electroslag remelting) and mature forging or hot rolling technology with better metallographic structure. The bearing will produce less heat and can withstand higher contact stress and higher impact toughness. Bearing steel can withstand high and low temperature hardness up to 60HRC, and its corrosion resistance (from the final heat treatment of quenching and tempering stages) is 100 times that of 9Cr18. It can work under ultra-low temperature for a long time and can be normally used in liquid oxygen, liquid nitrogen and liquefied natural gas. The bearings made of this material can be lubricated directly with water, liquid oxygen, liquefied natural gas, etc. without additional sealing; It can bear 2.2 times the rated load of bearings of the same structure made of ordinary materials; Under oil lubrication, the DMN value can reach more than 2000000, with extraordinary high-speed performance. Compared with the traditional bearing steel, the bearing life can be increased by 10 times.

Three types of corrosion-resistant steel balls for high-precision bearings

High performance, high corrosion resistance

1. Precision ceramic balls

Compared with ordinary steel ball, precision ceramic ball has excellent comprehensive characteristics, such as low density, high hardness, wear resistance, low thermal expansion coefficient, good thermal and chemical stability, insulation, non-magnetic and so on. The precision of ceramic ball can reach G3 grade, mainly used for ceramic ball bearings. In high-speed precision ceramic ball bearings, the most widely used are hybrid ceramic ball bearings, that is, the balls are made of ceramic balls and the bearing ring is still a steel ring. The standardization degree of this bearing is relatively high, the structure of the machine will not have too many changes, simple maintenance, especially suitable for high-speed work occasions. Its high-speed spindle assembly, with high speed, high rigidity, high power, long service life (ordinary steel bearings 2-5 times) and other advantages.

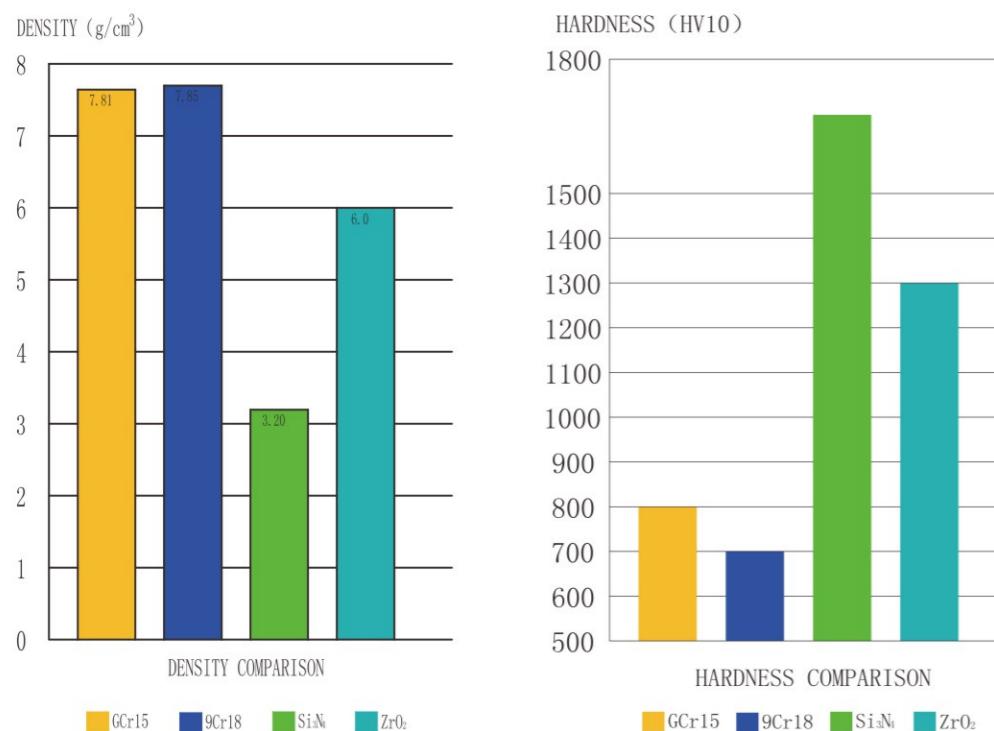




2.400 Series Stainless Steel Balls

400 series stainless steel balls are also known as martensitic stainless steel balls, which can be divided into 420 stainless steel balls, 440C stainless steel balls, etc. 400 series stainless steel balls are made of high carbon and chromium content stainless bearing steel, which is specially designed for bearings used in corrosive environments, combining the characteristics of material strength, high precision and rust resistance. In addition, 400 series stainless steel balls for water, food, alcohol, organic materials and various petrochemical products are corrosion resistant. Therefore, 400 series stainless steel balls are widely used in stainless steel bearings, which can make the bearing life twice as long as normal bearing steel.

3.300 series stainless steel balls


300 series stainless steel ball is also known as austenitic stainless steel ball, regular 304 stainless steel ball, 316 stainless steel ball and 316L stainless steel ball and so on. Due to the use of austenitic stainless steel as raw materials, 300 series stainless steel balls generally have strong rust resistance, corrosion resistance and high strength, and are non-magnetic or can be demagnetized. 300 series stainless steel balls are commonly used in stainless steel bearings, the corrosion resistance of these bearings is three times that of ordinary stainless steel bearings.

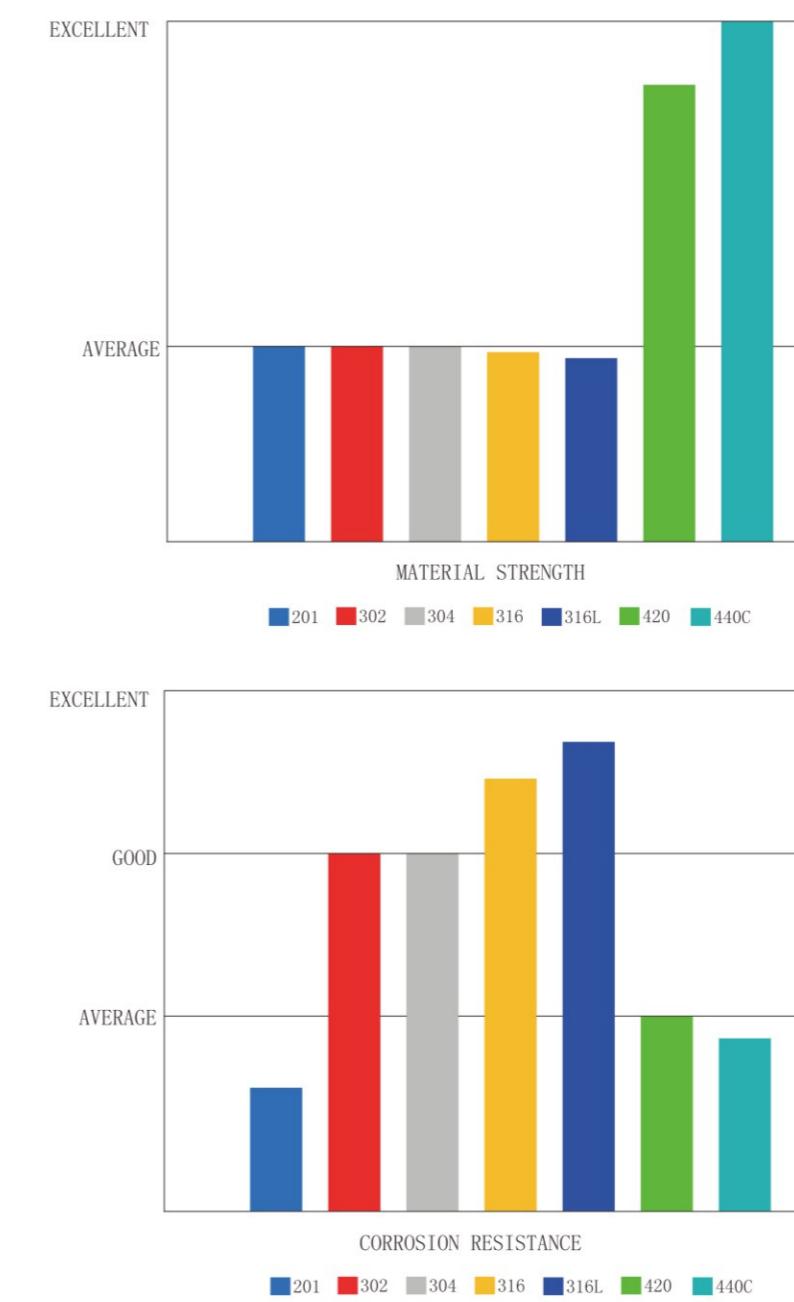

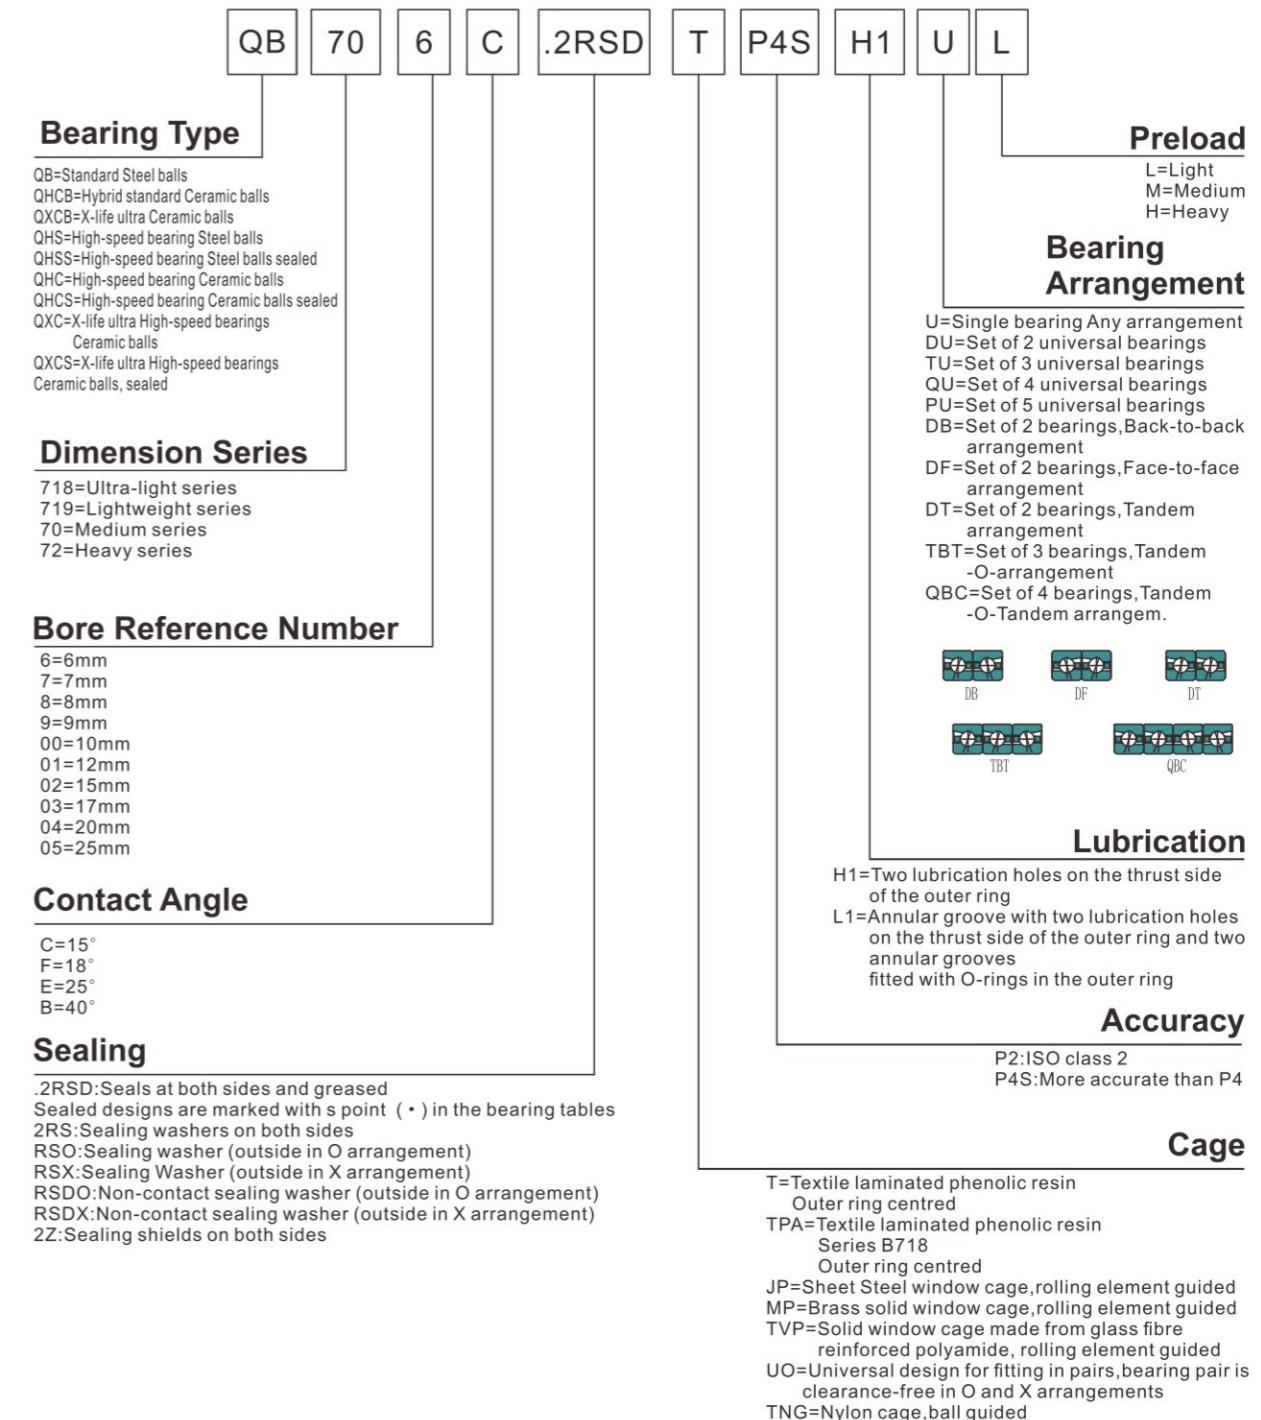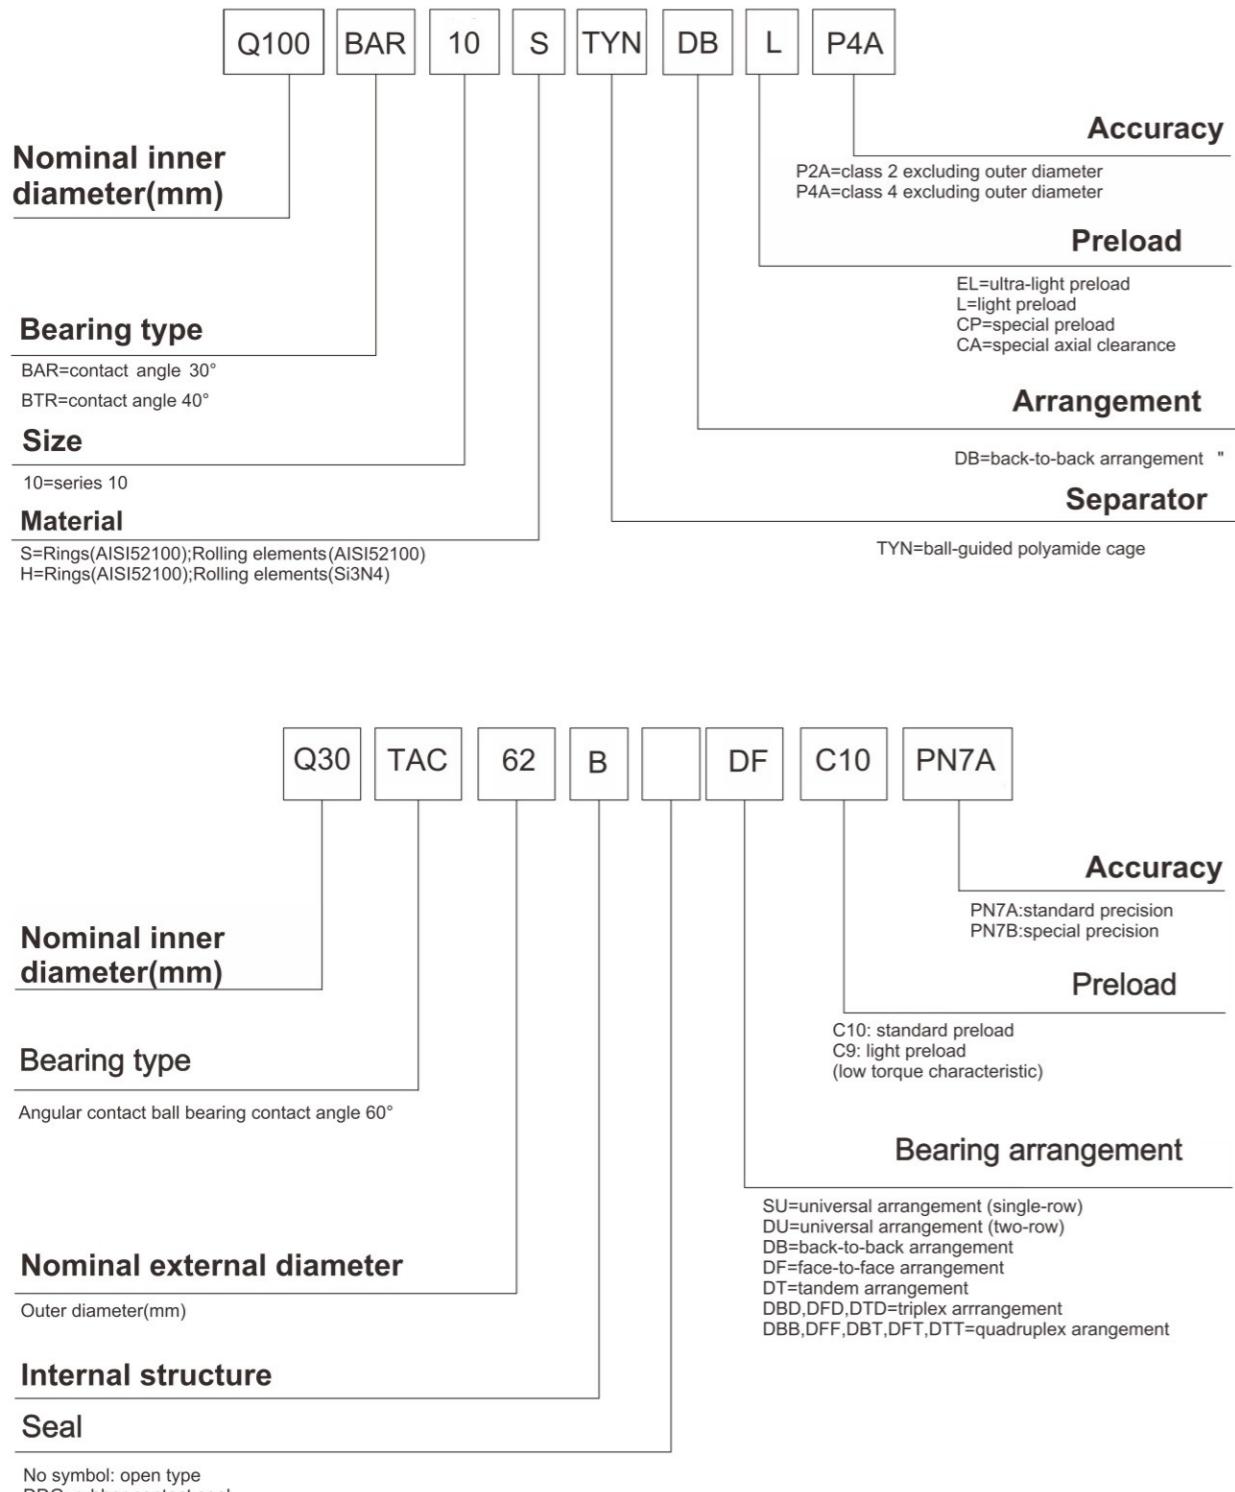


13 70.72.718.719 SERIES

Improved bearing kinematics and higher raceway quality give reduced friction, lower bearing temperatures and lower lubricant requirement.

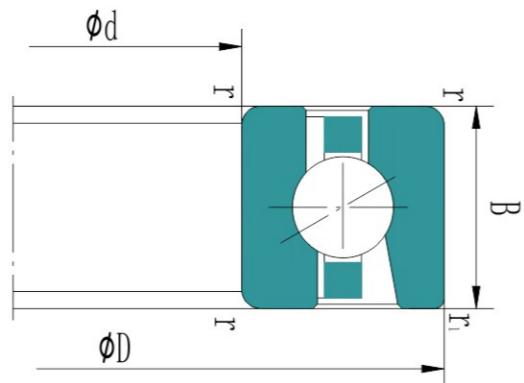
**46** QBAR, QBTR SERIES

For different contact angles, there are different rigidity.


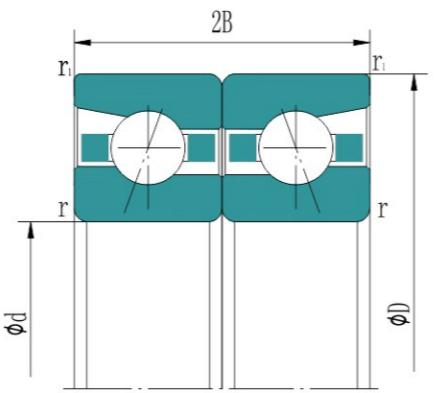
**48** QTAC B SERIES



Special internal design (contact angle 60 degrees and more balls) to increase rigidity.

High rotational accuracy, a new polyamide cage provides high rotational accuracy.

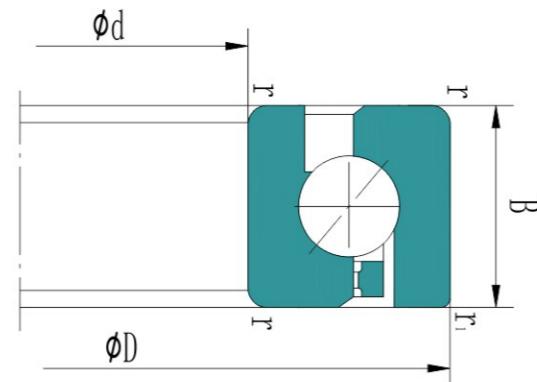**50** LOW NOISE HIGH PRECISION SERIES

Bearing seals can prevent the intrusion of external foreign matter and the loss of bearing lubricant

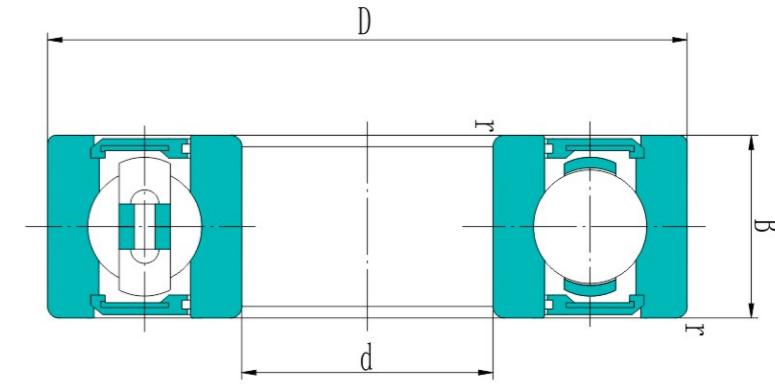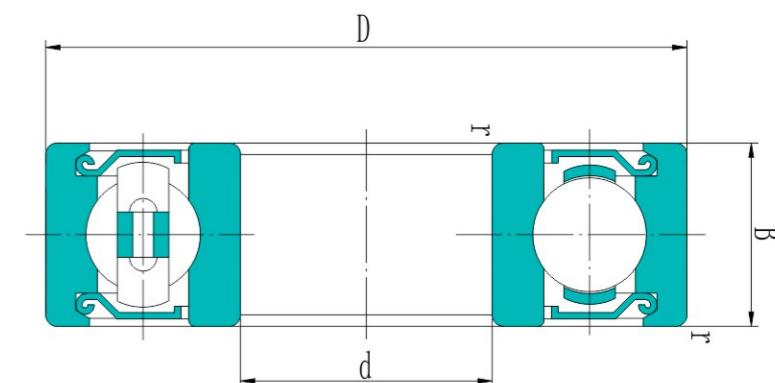**2RZ****2Z**

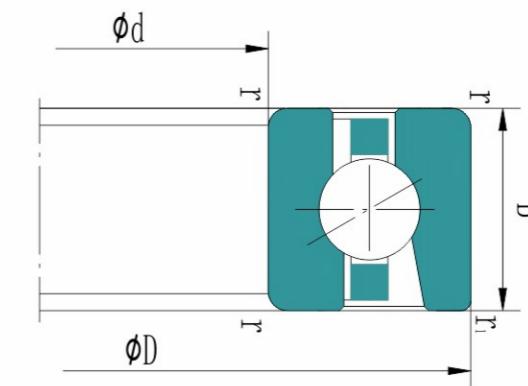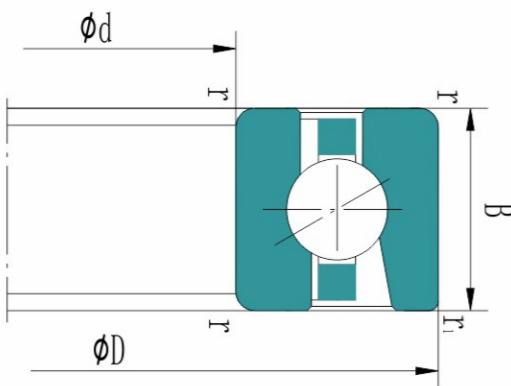



Model	Inner diameter	Outer diameter	Width	Chamfer	Mass	Load capacity		Available speed							
						d [mm]	D [mm]	B [mm]	r [mm]	r1 [mm]	M [kg]	Dynamic [kN]	Static [kN]	Lubrication rpm	Oil rpm
QB706C	6	17	6	0.3	0.3	0.005			2.36	0.97	95000	160000			
QB706E	6	17	6	0.3	0.3	0.005			2.28	0.93	85000	140000			
QHCB706C	6	17	6	0.3	0.3	0.004			1.63	0.67	120000	190000			
QHCB706E	6	17	6	0.3	0.3	0.004			1.56	0.66	100000	170000			
Qxcb706C	6	17	6	0.3	0.3	0.004			3.65	0.67	160000	260000			
Qxcb706E	6	17	6	0.3	0.3	0.004			3.45	0.66	130000	200000			
QHS706C	6	17	6	0.3	0.3	0.010			1.56	0.7	120000	190000			
QHS706E	6	17	6	0.3	0.3	0.010			1.50	0.66	100000	170000			
QHC706C	6	17	6	0.3	0.3	0.010			1.08	0.48	140000	220000			
QHC706E	6	17	6	0.3	0.3	0.010			1.04	0.46	120000	190000			
QXC706C	6	17	6	0.3	0.3	0.010			2.40	0.48	180000	300000			
QXC706E	6	17	6	0.3	0.3	0.010			2.32	0.46	160000	260000			
QB707C	7	19	6	0.3	0.3	0.008			2.60	1.14	85000	140000			
QB707E	7	19	6	0.3	0.3	0.008			2.50	1.1	75000	120000			
QHCB707C	7	19	6	0.3	0.3	0.007			1.80	0.8	110000	180000			
QHCB707E	7	19	6	0.3	0.3	0.007			1.73	0.77	95000	160000			
Qxcb707C	7	19	6	0.3	0.3	0.007			4.05	0.8	150000	240000			
Qxcb707E	7	19	6	0.3	0.3	0.007			3.90	0.77	120000	190000			
QHS707C	7	19	6	0.3	0.3	0.010			1.70	0.8	110000	180000			
QHS707E	7	19	6	0.3	0.3	0.010			1.60	0.77	90000	150000			
QHC707C	7	19	6	0.3	0.3	0.010			1.16	0.55	120000	190000			
QHC707E	7	19	6	0.3	0.3	0.010			1.10	0.53	110000	180000			
QXC707C	7	19	6	0.3	0.3	0.010			2.60	0.55	160000	260000			
QXC707E	7	19	6	0.3	0.3	0.010			2.45	0.53	140000	220000			
QB708C	8	22	7	0.3	0.3	0.010			3.80	1.73	75000	120000			
QB708E	8	22	7	0.3	0.3	0.010			3.75	1.66	67000	100000			
QHCB708C	8	22	7	0.3	0.3	0.009			2.65	1.20	95000	160000			
QHCB708E	8	22	7	0.3	0.3	0.009			2.55	1.16	80000	130000			
Qxcb708C	8	22	7	0.3	0.3	0.009			6.00	1.20	120000	190000			
Qxcb708E	8	22	7	0.3	0.3	0.009			5.70	1.16	100000	170000			

*Customized bearings are supplied according to your requirements.

*The listed models and sizes are for reference only, for detailed specifications, please contact our sales department.

*Customized bearings are supplied according to your requirements.

*The listed models and sizes are for reference only, for detailed specifications, please contact our sales department.

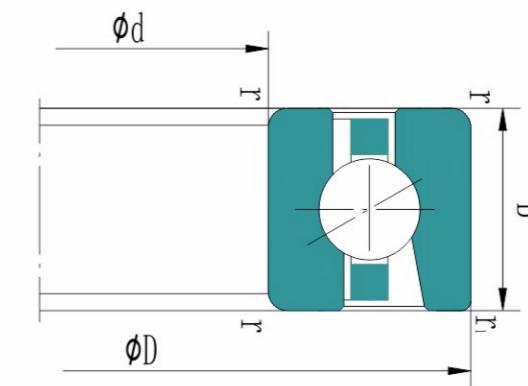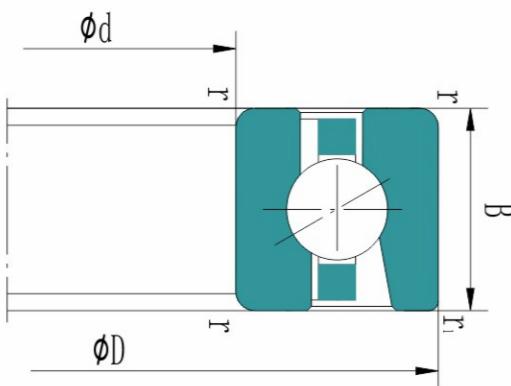



Model	Inner diameter	Outer diameter	Width	Chamfer	Mass	Load capacity		Available speed						
						d [mm]	D [mm]	B [mm]	r [mm]	r1 [mm]	M [kg]	Dynamic [kN]	Static [kN]	Lubrication rpm
QHC71900C	10	22	6	0.3	0.3	0.010			1.37	0.77	100000	170000		
QHC71900E	10	22	6	0.3	0.3	0.010			1.29	0.72	85000	140000		
QXC71900C	10	22	6	0.3	0.3	0.010			3.05	0.77	130000	200000		
QXC71900E	10	22	6	0.3	0.3	0.010			2.90	0.72	110000	180000		
QB7000C	10	26	8	0.3	0.3	0.02			4.25	2.08	60000	90000		
QB7000E	10	26	8	0.3	0.3	0.02			4.05	2.00	56000	85000		
QHCB7000C	10	26	8	0.3	0.3	0.02			2.90	1.43	80000	130000		
QHCB7000E	10	26	8	0.3	0.3	0.02			2.80	1.40	67000	100000		
Qxcb7000C	10	26	8	0.3	0.3	0.02			6.40	1.43	100000	170000		
Qxcb7000E	10	26	8	0.3	0.3	0.02			6.30	1.40	85000	140000		
QHS7000C	10	26	8	0.3	0.3	0.02			2.75	1.60	80000	130000		
QHS7000E	10	26	8	0.3	0.3	0.02			2.60	1.50	67000	100000		
QHC7000C	10	26	8	0.3	0.3	0.02			1.90	1.10	90000	150000		
QHC7000E	10	26	8	0.3	0.3	0.02			1.80	1.06	75000	120000		
QXC7000C	10	26	8	0.3	0.3	0.02			4.30	1.10	120000	190000		
QXC7000E	10	26	8	0.3	0.3	0.02			4.00	1.06	100000	170000		
QB7200C	10	30	9	0.6	0.6	0.03			5.85	2.90	56000	85000		
QB7200E	10	30	9	0.6	0.6	0.03			5.60	2.80	50000	75000		
QHCB7200C	10	30	9	0.6	0.6	0.03			4.00	2.04	70000	110000		
QHCB7200E	10	30	9	0.6	0.6	0.03			3.90	1.96	60000	90000		
QB71801 C	12	21	5	0.3	0.1	0.01			2.08	1.18	67000	100000		
QB71801 E	12	21	5	0.3	0.1	0.01			1.96	1.12	60000	90000		
QHCB71801 C	12	21	5	0.3	0.1	0.01			1.43	0.83	85000	140000		
QHCB71801E	12	21	5	0.3	0.1	0.01			1.34	0.78	75000	120000		
QB71901C	12	24	6	0.3	0.3	0.01			3.35	1.86	60000	90000		
QB71901E	12	24	6	0.3	0.3	0.01			3.20	1.76	56000	85000		
QHCB71901C	12	24	6	0.3	0.3	0.01			2.32	1.29	80000	130000		
QHCB71901E	12	24	6	0.3	0.3	0.01			2.20	1.22	67000	100000		
Qxcb71901C	12	24	6	0.3	0.3	0.01			5.20	1.29	100000	170000		
Qxcb71901E	12	24	6	0.3	0.3	0.01			5.00	1.22	85000	140000		

*Customized bearings are supplied according to your requirements.

*The listed models and sizes are for reference only, for detailed specifications, please contact our sales department.

*Customized bearings are supplied according to your requirements.

*The listed models and sizes are for reference only, for detailed specifications, please contact our sales department.

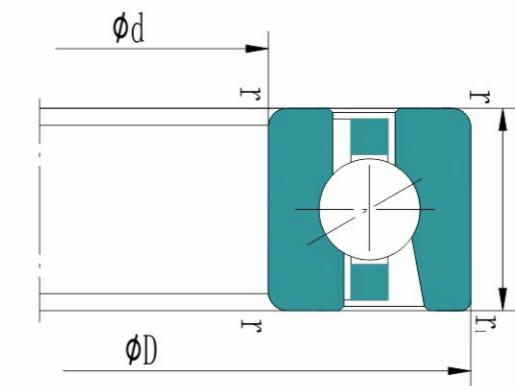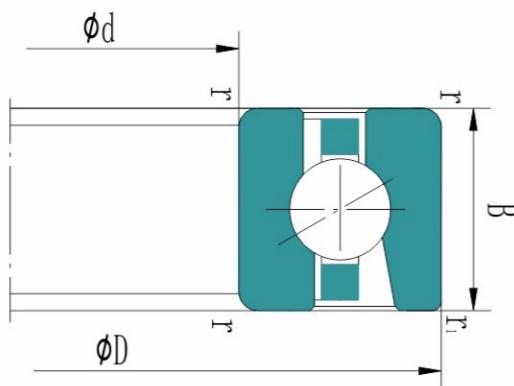



Model	Inner diameter	Outer diameter	Width	Chamfer	Mass	Load capacity		Available speed							
						d [mm]	D [mm]	B [mm]	r [mm]	r1 [mm]	M [kg]	Dynamic [kN]	Static [kN]	Lubrication rpm	Oil rpm
Qxcb71902C	15	28	7	0.3	0.3	0.01	7.70	2.00	85000	140000					
Qxcb71902E	15	28	7	0.3	0.3	0.01	7.50	1.93	70000	110000					
Qhs71902C	15	28	7	0.3	0.3	0.02	2.80	1.76	67000	100000					
Qhs71902E	15	28	7	0.3	0.3	0.02	2.65	1.66	56000	85000					
Qhc71902C	15	28	7	0.3	0.3	0.02	1.93	1.22	75000	120000					
Qhc71902E	15	28	7	0.3	0.3	0.02	1.83	1.16	63000	95000					
Qxc71902C	15	28	7	0.3	0.3	0.02	4.30	1.22	100000	160000					
Qxc71902E	15	28	7	0.3	0.3	0.02	4.05	1.16	85000	140000					
QB7002C	15	32	9	0.3	0.3	0.03	6.20	3.40	48000	70000					
QB7002E	15	32	9	0.3	0.3	0.03	6.00	3.25	43000	63000					
Qhcb7002C	15	32	9	0.3	0.3	0.03	4.30	2.36	60000	90000					
Qhcb7002E	15	32	9	0.3	0.3	0.03	4.15	2.24	50000	75000					
Qxcb7002C	15	32	9	0.3	0.3	0.03	9.65	2.36	75000	120000					
Qxcb7002E	15	32	9	0.3	0.3	0.03	9.30	2.24	67000	100000					
Qhs7002C	15	32	9	0.3	0.3	0.03	3.75	2.45	60000	90000					
Qhs7002E	15	32	9	0.3	0.3	0.03	3.55	2.32	50000	75000					
Qhc7002C	15	32	9	0.3	0.3	0.03	2.60	1.70	70000	110000					
Qhc7002E	15	32	9	0.3	0.3	0.03	2.45	1.60	60000	90000					
Qxc7002C	15	32	9	0.3	0.3	0.03	5.85	1.70	90000	150000					
Qxc7002E	15	32	9	0.3	0.3	0.03	5.50	1.60	80000	130000					
QB7202C	15	35	11	0.6	0.6	0.04	9.65	5.00	45000	67000					
QB7202E	15	35	11	0.6	0.6	0.04	9.30	4.80	40000	60000					
Qhcb7202C	15	35	11	0.6	0.6	0.04	6.70	3.45	56000	85000					
Qhcb7202E	15	35	11	0.6	0.6	0.04	6.40	3.35	48000	70000					
QB71803C	17	26	5	0.3	0.1	0.01	2.32	1.60	50000	75000					
QB71803E	17	26	5	0.3	0.1	0.01	2.20	1.53	48000	70000					
Qhcb71803C	17	26	5	0.3	0.1	0.01	1.60	1.12	67000	100000					
Qhcb71803E	17	26	5	0.3	0.1	0.01	1.53	1.06	56000	85000					
QB71903C	17	30	7	0.3	0.3	0.02	5.30	3.15	48000	70000					
QB71903E	17	30	7	0.3	0.3	0.02	5.00	3.00	43000	63000					

*Customized bearings are supplied according to your requirements.

*The listed models and sizes are for reference only, for detailed specifications, please contact our sales department.

*Customized bearings are supplied according to your requirements.

*The listed models and sizes are for reference only, for detailed specifications, please contact our sales department.

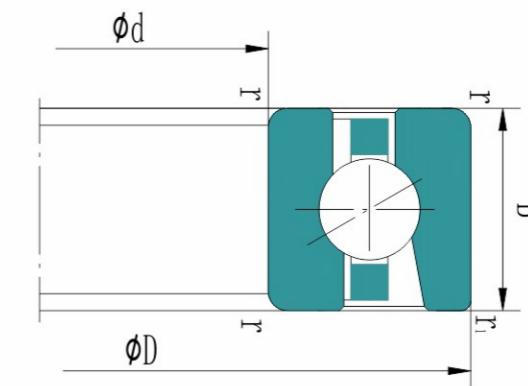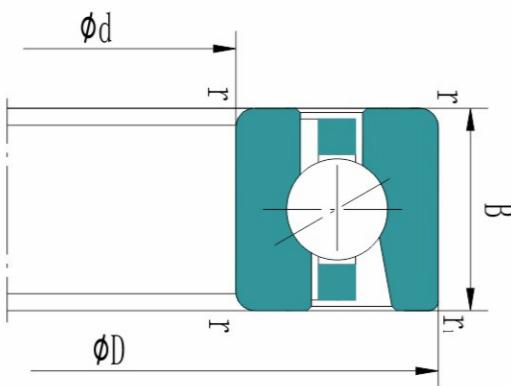



Model	Inner diameter	Outer diameter	Width	Chamfer	Mass	Load capacity		Available speed			
						d [mm]	D [mm]	B [mm]	r [mm]	r1 [mm]	M [kg]
QB71904C	20	37	9	0.3	0.3	0.03		7.35	4.55	38000	56000
QB71904E	20	37	9	0.3	0.3	0.03		6.95	4.40	36000	53000
QHCB71904C	20	37	9	0.3	0.3	0.03		5.00	3.20	50000	75000
QHCB71904E	20	37	9	0.3	0.3	0.03		4.80	3.05	43000	63000
QXCB71904C	20	37	9	0.3	0.3	0.03		11.20	3.20	63000	95000
QXCB71904E	20	37	9	0.3	0.3	0.03		10.80	3.05	56000	85000
QHS71904C	20	37	9	0.3	0.3	0.04		3.90	2.85	50000	75000
QHS71904E	20	37	9	0.3	0.3	0.04		3.75	2.70	43000	63000
QHC71904C	20	37	9	0.3	0.3	0.04		2.70	1.96	56000	85000
QHC71904E	20	37	9	0.3	0.3	0.04		2.55	1.86	48000	70000
QXC71904C	20	37	9	0.3	0.3	0.04		6.00	1.96	75000	120000
QXC71904E	20	37	9	0.3	0.3	0.04		5.70	1.86	63000	95000
QB7004C	20	42	12	0.6	0.6	0.07		10.40	6.00	36000	53000
QB7004E	20	42	12	0.6	0.6	0.07		10.00	5.70	32000	48000
QHCB7004C	20	42	12	0.6	0.6	0.06		7.20	4.15	45000	67000
QHCB7004E	20	42	12	0.6	0.6	0.06		6.95	4.00	38000	56000
QXCB7004C	20	42	12	0.6	0.6	0.06		16.00	4.15	60000	90000
QXCB7004E	20	42	12	0.6	0.6	0.06		15.60	4.00	50000	75000
QHS7004C	20	42	12	0.6	0.6	0.08		6.20	4.55	45000	67000
QHS7004E	20	42	12	0.6	0.6	0.08		5.85	4.30	38000	56000
QHC7004C	20	42	12	0.6	0.6	0.08		4.30	3.20	53000	80000
QHC7004E	20	42	12	0.6	0.6	0.08		4.05	3.00	45000	67000
QXC7004C	20	42	12	0.6	0.6	0.08		9.50	3.20	67000	100000
QXC7004E	20	42	12	0.6	0.6	0.08		9.00	3.00	56000	85000
QB7204C	20	47	14	1.0	1.0	0.10		14.60	8.15	32000	48000
QB7204E	20	47	14	1.0	1.0	0.10		14.00	7.80	30000	45000
QHCB7204C	20	47	14	1.0	1.0	0.09		10.00	5.60	43000	63000
QHCB7204E	20	47	14	1.0	1.0	0.09		9.65	5.40	36000	53000
QB71805C	25	37	7	0.3	0.1	0.02		4.15	3.20	36000	53000
QB71805E	25	37	7	0.3	0.1	0.02		3.90	3.00	32000	48000

*Customized bearings are supplied according to your requirements.

*The listed models and sizes are for reference only, for detailed specifications, please contact our sales department.

*Customized bearings are supplied according to your requirements.

*The listed models and sizes are for reference only, for detailed specifications, please contact our sales department.

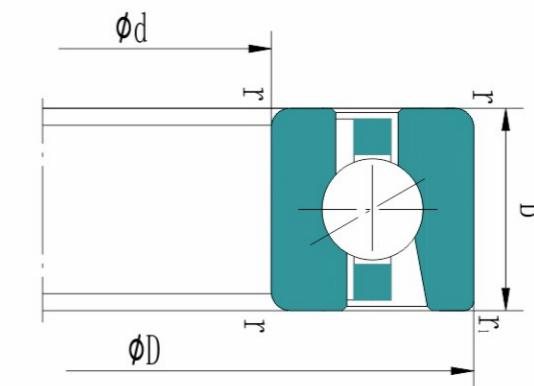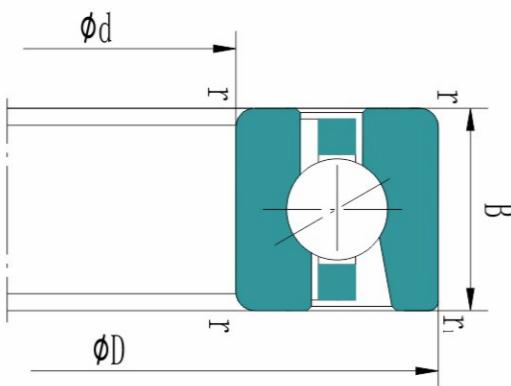



Model	Inner diameter	Outer diameter	Width	Chamfer	Mass	Load capacity		Available speed		
						d [mm]	D [mm]	B [mm]	r [mm]	r1 [mm]
QB71806C	30	42	7	0.3	0.1	0.03	4.40	3.65	30000	45000
QB71806E	30	42	7	0.3	0.1	0.03	4.15	3.40	28000	43000
QHCB71806C	30	42	7	0.3	0.1	0.03	3.05	2.55	38000	56000
QHCB71806E	30	42	7	0.3	0.1	0.03	2.85	2.40	34000	50000
QB71906C	30	47	9	0.3	0.3	0.05	8.65	6.55	28000	43000
QB71906E	30	47	9	0.3	0.3	0.05	8.15	6.30	26000	40000
QHCB71906C	30	47	9	0.3	0.3	0.04	6.00	4.65	36000	53000
QHCB71906E	30	47	9	0.3	0.3	0.04	5.60	4.40	32000	48000
QXCB71906C	30	47	9	0.3	0.3	0.04	13.40	4.65	48000	70000
QXCB71906E	30	47	9	0.3	0.3	0.04	12.50	4.40	40000	60000
QHS71906C	30	47	9	0.3	0.3	0.05	6.40	5.20	36000	53000
QHS71906E	30	47	9	0.3	0.3	0.05	6.00	4.90	32000	48000
QHC71906C	30	47	9	0.3	0.3	0.05	4.40	3.65	43000	63000
QHC71906E	30	47	9	0.3	0.3	0.05	4.15	3.45	36000	53000
QXC71906C	30	47	9	0.3	0.3	0.05	9.80	3.65	53000	80000
QXC71906E	30	47	9	0.3	0.3	0.05	9.30	3.45	48000	70000
QB7006C	30	55	13	1.0	1.0	0.11	15.00	10.20	26000	40000
QB7006E	30	55	13	1.0	1.0	0.11	14.30	9.80	24000	38000
QHCB7006C	30	55	13	1.0	1.0	0.10	10.40	7.20	32000	48000
QHCB7006E	30	55	13	1.0	1.0	0.10	10.00	6.80	28000	43000
QXCB7006C	30	55	13	1.0	1.0	0.10	23.20	7.20	43000	60000
QXCB7006E	30	55	13	1.0	1.0	0.10	22.40	6.80	36000	53000
QHS7006C	30	55	13	1.0	1.0	0.13	8.80	7.10	32000	48000
QHS7006E	30	55	13	1.0	1.0	0.13	8.30	6.70	28000	43000
QHC7006C	30	55	13	1.0	1.0	0.12	6.00	4.90	38000	56000
QHC7006E	30	55	13	1.0	1.0	0.12	5.70	4.65	32000	48000
QXC7006C	30	55	13	1.0	1.0	0.12	13.40	4.90	50000	75000
QXC7006E	30	55	13	1.0	1.0	0.12	12.70	4.65	40000	60000
QB7206C	30	62	16	1.0	1.0	0.19	23.20	14.60	24000	38000
QB7206E	30	62	16	1.0	1.0	0.19	22.00	14.00	22000	36000

*Customized bearings are supplied according to your requirements.

*The listed models and sizes are for reference only, for detailed specifications, please contact our sales department.

*Customized bearings are supplied according to your requirements.

*The listed models and sizes are for reference only, for detailed specifications, please contact our sales department.

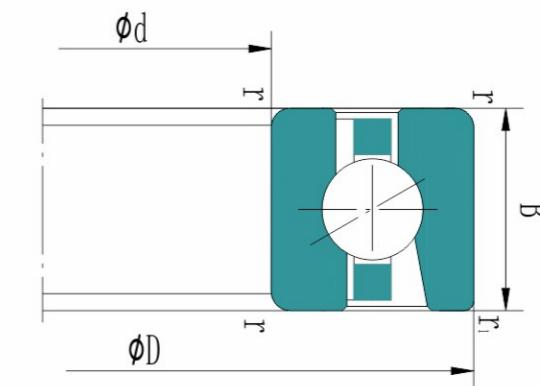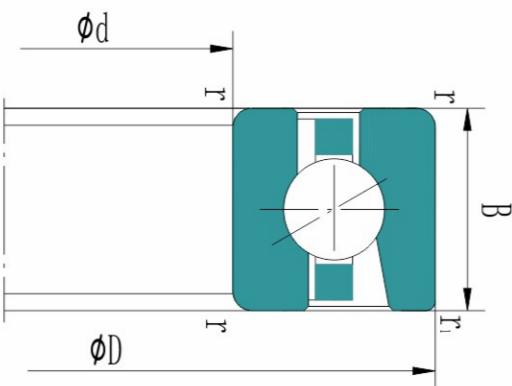



Model	Inner diameter	Outer diameter	Width	Chamfer	Mass	Load capacity		Available speed			
						d [mm]	D [mm]	B [mm]	r [mm]	r1 [mm]	M [kg]
QB7207C	35	72	17	1.1	1.1	0.28	25.50	18.00	20000	34000	
QB7207E	35	72	17	1.1	1.1	0.28	24.50	17.00	19000	32000	
QHCB7207C	35	72	17	1.1	1.1	0.24	17.60	8.80	26000	40000	
QHCB7207E	35	72	17	1.1	1.1	0.24	16.60	8.50	22000	36000	
QB71808C	40	52	7	0.3	0.1	0.03	4.80	4.55	24000	38000	
QB71808E	40	52	7	0.3	0.1	0.03	4.55	4.25	22000	36000	
QHCB71808C	40	52	7	0.3	0.1	0.03	3.35	3.15	30000	45000	
QHCB71808E	40	52	7	0.3	0.1	0.03	3.15	2.90	26000	40000	
QB71908C	40	62	12	0.6	0.6	0.11	17.60	13.70	22000	36000	
QB71908E	40	62	12	0.6	0.6	0.11	16.60	13.20	20000	34000	
QHCB71908C	40	62	12	0.6	0.6	0.09	12.20	9.65	28000	43000	
QHCB71908E	40	62	12	0.6	0.6	0.09	11.40	9.15	24000	38000	
QXCB71908C	40	62	12	0.6	0.6	0.09	27.00	9.65	36000	53000	
QXCB71908E	40	62	12	0.6	0.6	0.09	25.50	9.15	30000	45000	
QHS71908C	40	62	12	0.6	0.6	0.13	7.20	6.95	28000	43000	
QHS71908E	40	62	12	0.6	0.6	0.13	6.80	6.40	24000	38000	
QHC71908C	40	62	12	0.6	0.6	0.12	5.00	4.80	32000	48000	
QHC71908E	40	62	12	0.6	0.6	0.12	4.75	4.50	28000	43000	
QXC71908C	40	62	12	0.6	0.6	0.12	11.20	4.80	40000	60000	
QXC71908E	40	62	12	0.6	0.6	0.12	10.60	4.50	36000	53000	
QB7008C	40	68	15	1.0	1.0	0.19	20.40	16.00	20000	34000	
QB7008E	40	68	15	1.0	1.0	0.19	19.60	15.00	19000	32000	
QHCB7008C	40	68	15	1.0	1.0	0.17	14.30	11.00	26000	40000	
QHCB7008E	40	68	15	1.0	1.0	0.17	13.40	10.60	22000	36000	
QXCB7008C	40	68	15	1.0	1.0	0.17	32.00	11.00	34000	50000	
QXCB7008E	40	68	15	1.0	1.0	0.17	30.00	10.60	28000	43000	
QHS7008C	40	68	15	1.0	1.0	0.22	10.00	9.30	26000	40000	
QHS7008E	40	68	15	1.0	1.0	0.22	9.30	8.65	22000	36000	
QHC7008C	40	68	15	1.0	1.0	0.20	6.80	6.55	30000	45000	
QHC7008E	40	68	15	1.0	1.0	0.20	6.40	6.10	26000	40000	

*Customized bearings are supplied according to your requirements.

*The listed models and sizes are for reference only, for detailed specifications, please contact our sales department.

*Customized bearings are supplied according to your requirements.

*The listed models and sizes are for reference only, for detailed specifications, please contact our sales department.

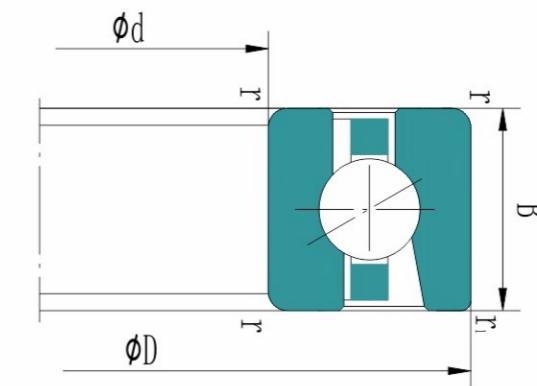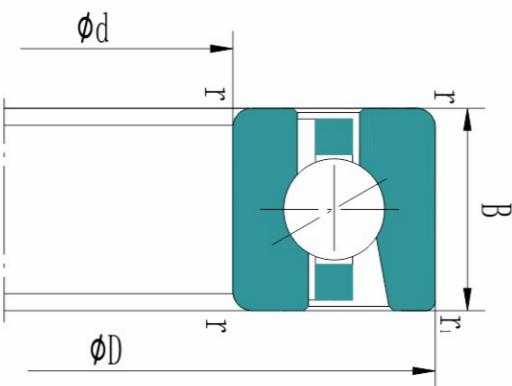



Model	Inner diameter	Outer diameter	Width	Chamfer	Mass	Load capacity		Available speed						
						d [mm]	D [mm]	B [mm]	r [mm]	r1 [mm]	M [kg]	Dynamic [kN]	Static [kN]	Lubrication rpm
QHC7009C	45	75	16	1.0	1.0	0.26			8.80	8.50	26000	40000		
QHC7009E	45	75	16	1.0	1.0	0.26			8.30	8.00	24000	38000		
QXC7009C	45	75	16	1.0	1.0	0.26			19.60	8.50	34000	50000		
QXC7009E	45	75	16	1.0	1.0	0.26			18.60	8.00	30000	45000		
QB7209C	45	85	19	1.1	1.1	0.41			33.50	24.50	17000	28000		
QB7209E	45	85	19	1.1	1.1	0.41			32.00	23.60	15000	24000		
QHCB7209C	45	85	19	1.1	1.1	0.34			23.20	12.20	22000	36000		
QHCB7209E	45	85	19	1.1	1.1	0.34			22.00	11.60	18000	30000		
QB71810C	50	65	7	0.3	0.1	0.05			7.35	7.35	19000	32000		
QB71810E	50	65	7	0.3	0.1	0.05			6.95	6.80	17000	28000		
QHCB71810C	50	65	7	0.3	0.1	0.05			5.10	5.10	24000	38000		
QHCB71810E	50	65	7	0.3	0.1	0.05			4.80	4.75	20000	34000		
QB71910C	50	72	12	0.6	0.6	0.13			19.00	16.60	18000	30000		
QB71910E	50	72	12	0.6	0.6	0.13			18.00	15.60	16000	26000		
QHCB71910C	50	72	12	0.6	0.6	0.11			13.20	11.60	22000	36000		
QHCB71910E	50	72	12	0.6	0.6	0.11			12.20	11.00	20000	34000		
QXCB71910C	50	72	12	0.6	0.6	0.11			29.00	11.60	30000	43000		
QXCB71910E	50	72	12	0.6	0.6	0.11			27.00	11.00	26000	40000		
QHS71910C	50	72	12	0.6	0.6	0.15			10.40	10.20	22000	36000		
QHS71910E	50	72	12	0.6	0.6	0.15			9.80	9.65	20000	34000		
QHC71910C	50	72	12	0.6	0.6	0.14			7.10	7.20	26000	40000		
QHC71910E	50	72	12	0.6	0.6	0.14			6.70	6.70	22000	36000		
QXC71910C	50	72	12	0.6	0.6	0.14			16.00	7.20	34000	50000		
QXC71910E	50	72	12	0.6	0.6	0.14			15.00	6.70	30000	45000		
QB7010C	50	80	16	1.0	1.0	0.25			28.50	22.80	17000	28000		
QB7010E	50	80	16	1.0	1.0	0.25			27.00	21.60	15000	24000		
QHCB7010C	50	80	16	1.0	1.0	0.21			19.60	16.00	22000	36000		
QHCB7010E	50	80	16	1.0	1.0	0.21			18.60	15.30	18000	30000		
QXCB7010C	50	80	16	1.0	1.0	0.21			44.00	16.00	28000	43000		
QXCB7010E	50	80	16	1.0	1.0	0.21			41.50	15.30	24000	38000		

*Customized bearings are supplied according to your requirements.

*The listed models and sizes are for reference only, for detailed specifications, please contact our sales department.

*Customized bearings are supplied according to your requirements.

*The listed models and sizes are for reference only, for detailed specifications, please contact our sales department.

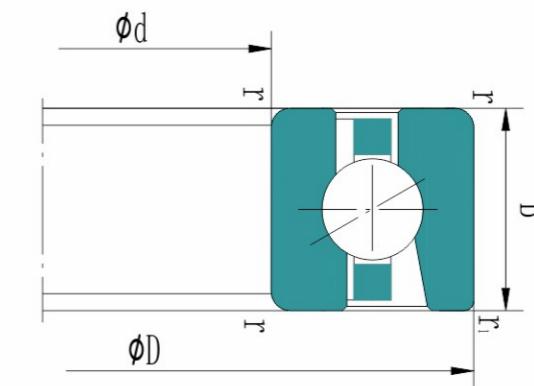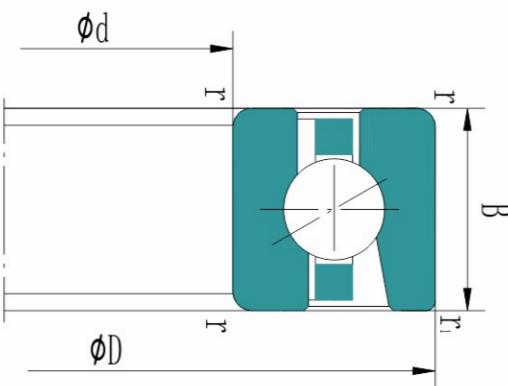



Model	Inner diameter	Outer diameter	Width	Chamfer	Mass	Load capacity		Available speed							
						d [mm]	D [mm]	B [mm]	r [mm]	r1 [mm]	M [kg]	Dynamic [kN]	Static [kN]	Lubrication rpm	Oil rpm
Qxcb7011C	55	90	18	1.1	1.1	0.32	58.50	21.60	26000	40000					
Qxcb7011E	55	90	18	1.1	1.1	0.32	56.00	20.40	22000	36000					
Qhs7011C	55	90	18	1.1	1.1	0.43	18.60	19.00	19000	32000					
Qhs7011E	55	90	18	1.1	1.1	0.43	17.60	17.60	17000	28000					
Qhc7011C	55	90	18	1.1	1.1	0.40	12.90	13.20	22000	36000					
Qhc7011E	55	90	18	1.1	1.1	0.40	12.20	12.20	19000	32000					
Qxc7011C	55	90	18	1.1	1.1	0.40	29.00	13.20	28000	43000					
Qxc7011E	55	90	18	1.1	1.1	0.40	27.00	12.20	24000	38000					
QB7211C	55	100	21	1.5	1.5	0.61	46.50	37.50	14000	22000					
QB7211E	55	100	21	1.5	1.5	0.61	44.00	35.50	13000	20000					
Qhcb7211C	55	100	21	1.5	1.5	0.51	32.00	18.30	18000	30000					
Qhcb7211E	55	100	21	1.5	1.5	0.51	30.50	17.60	15000	24000					
QB71812C	60	78	10	0.3	0.1	0.10	13.20	13.20	16000	26000					
QB71812E	60	78	10	0.3	0.1	0.10	12.20	12.20	14000	22000					
Qhcb71812C	60	78	10	0.3	0.1	0.10	9.00	9.15	20000	34000					
Qhcb71812E	60	78	10	0.3	0.1	0.10	8.50	8.50	17000	28000					
QB71912C	60	85	13	1.0	1.0	0.19	24.00	22.80	15000	24000					
QB71912E	60	85	13	1.0	1.0	0.19	22.80	21.60	14000	22000					
Qhcb71912C	60	85	13	1.0	1.0	0.16	16.60	16.00	19000	32000					
Qhcb71912E	60	85	13	1.0	1.0	0.16	15.60	15.00	17000	28000					
Qxcb71912C	60	85	13	1.0	1.0	0.16	37.50	16.00	26000	40000					
Qxcb71912E	60	85	13	1.0	1.0	0.16	34.50	15.00	22000	36000					
Qhs71912C	60	85	13	1.0	1.0	0.21	14.00	14.60	19000	32000					
Qhs71912E	60	85	13	1.0	1.0	0.21	13.20	13.40	17000	28000					
Qhc71912C	60	85	13	1.0	1.0	0.19	9.65	10.00	22000	36000					
Qhc71912E	60	85	13	1.0	1.0	0.19	9.00	9.50	19000	32000					
Qxc71912C	60	85	13	1.0	1.0	0.19	21.60	10.00	28000	43000					
Qxc71912E	60	85	13	1.0	1.0	0.19	20.00	9.50	24000	38000					
QB7012C	60	95	18	1.1	1.1	0.40	39.00	33.50	14000	22000					
QB7012E	60	95	18	1.1	1.1	0.40	36.50	31.50	13000	20000					

*Customized bearings are supplied according to your requirements.

*The listed models and sizes are for reference only, for detailed specifications, please contact our sales department.

*Customized bearings are supplied according to your requirements.

*The listed models and sizes are for reference only, for detailed specifications, please contact our sales department.

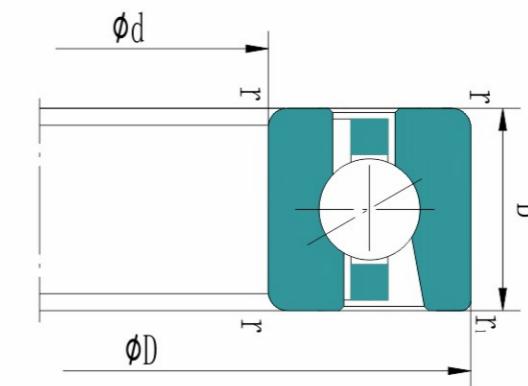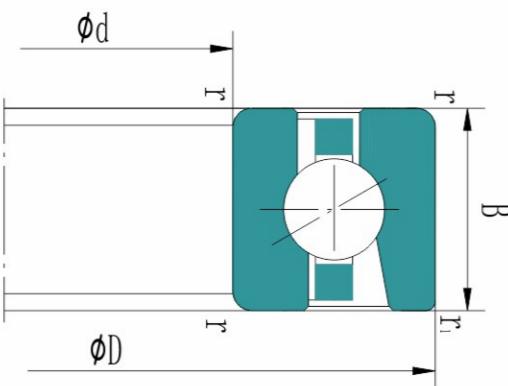



Model	Inner diameter	Outer diameter	Width	Chamfer	Mass	Load capacity		Available speed			
						d [mm]	D [mm]	B [mm]	r [mm]	r1 [mm]	M [kg]
QB7013C	65	100	18	1.1	1.1	0.42	40.00	35.50	13000	20000	
QB7013E	65	100	18	1.1	1.1	0.42	38.00	33.50	12000	19000	
QHCB7013C	65	100	18	1.1	1.1	0.36	27.50	24.50	17000	28000	
QHCB7013E	65	100	18	1.1	1.1	0.36	26.00	23.60	15000	24000	
Qxcb7013C	65	100	18	1.1	1.1	0.36	61.00	24.50	22000	36000	
Qxcb7013E	65	100	18	1.1	1.1	0.36	58.50	23.60	19000	32000	
QHS7013C	65	100	18	1.1	1.1	0.48	20.00	21.60	17000	28000	
QHS7013E	65	100	18	1.1	1.1	0.48	19.00	20.00	15000	24000	
QHC7013C	65	100	18	1.1	1.1	0.45	13.70	15.00	20000	34000	
QHC7013E	65	100	18	1.1	1.1	0.45	12.90	14.00	17000	28000	
QXC7013C	65	100	18	1.1	1.1	0.45	30.50	15.00	26000	40000	
QXC7013E	65	100	18	1.1	1.1	0.45	28.50	14.00	22000	36000	
QB7213C	65	120	23	1.5	1.5	1.02	57.00	48.00	12000	19000	
QB7213E	65	120	23	1.5	1.5	1.02	54.00	45.50	11000	18000	
QHCB7213C	65	120	23	1.5	1.5	0.88	40.00	23.60	15000	24000	
QHCB7213E	65	120	23	1.5	1.5	0.88	37.50	22.40	13000	20000	
QB71814C	70	90	10	0.6	0.3	0.14	14.00	15.00	14000	22000	
QB71814E	70	90	10	0.6	0.3	0.14	12.90	13.70	13000	20000	
QHCB71814C	70	90	10	0.6	0.3	0.14	9.50	10.40	18000	30000	
QHCB71814E	70	90	10	0.6	0.3	0.14	9.50	9.65	15000	24000	
QB71914C	70	100	16	1.0	1.0	0.33	33.50	32.50	13000	20000	
QB71914E	70	100	16	1.0	1.0	0.33	31.50	31.00	12000	19000	
QHCB71914C	70	100	16	1.0	1.0	0.28	23.20	22.80	16000	26000	
QHCB71914E	70	100	16	1.0	1.0	0.28	22.00	21.60	14000	22000	
Qxcb71914C	70	100	16	1.0	1.0	0.28	52.00	22.80	22000	36000	
Qxcb71914E	70	100	16	1.0	1.0	0.28	49.00	21.60	18000	30000	
QHS71914C	70	100	16	1.0	1.0	0.37	18.30	20.00	16000	26000	
QHS71914E	70	100	16	1.0	1.0	0.37	17.30	18.60	14000	22000	
QHC71914C	70	100	16	1.0	1.0	0.35	12.70	14.00	19000	32000	
QHC71914E	70	100	16	1.0	1.0	0.35	12.00	13.20	16000	26000	

*Customized bearings are supplied according to your requirements.

*The listed models and sizes are for reference only, for detailed specifications, please contact our sales department.

*Customized bearings are supplied according to your requirements.

*The listed models and sizes are for reference only, for detailed specifications, please contact our sales department.

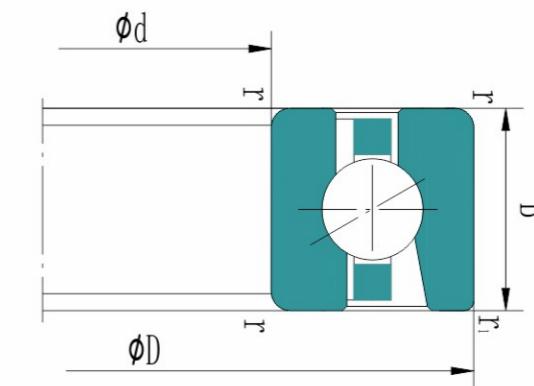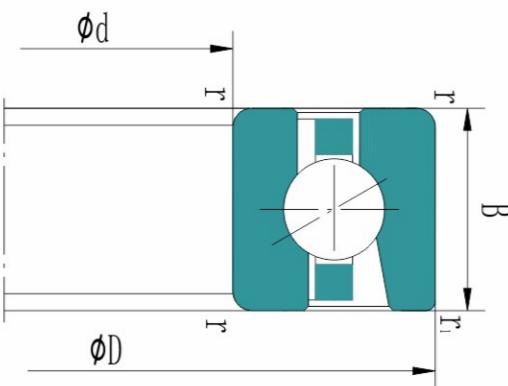



Model	Inner diameter	Outer diameter	Width	Chamfer	Mass	Load capacity		Available speed							
						d [mm]	D [mm]	B [mm]	r [mm]	r1 [mm]	M [kg]	Dynamic [kN]	Static [kN]	Lubrication rpm	Oil rpm
QHC71915C	75	105	16	1.0	1.0	0.37	12.90	15.00	18000	30000					
QHC71915E	75	105	16	1.0	1.0	0.37	12.20	13.70	15000	24000					
QXC71915C	75	105	16	1.0	1.0	0.37	29.00	15.00	23000	40000					
QXC71915E	75	105	16	1.0	1.0	0.37	27.00	13.70	19000	32000					
QB7015C	75	115	20	1.1	1.1	0.62	51.00	46.50	12000	19000					
QB7015E	75	115	20	1.1	1.1	0.62	48.00	44.00	11000	18000					
QHCB7015C	75	115	20	1.1	1.1	0.53	35.50	32.50	15000	24000					
QHCB7015E	75	115	20	1.1	1.1	0.53	33.50	30.50	13000	20000					
Qxcb7015C	75	115	20	1.1	1.1	0.53	80.00	32.50	19000	32000					
Qxcb7015E	75	115	20	1.1	1.1	0.53	75.00	30.50	16000	26000					
QHS7015C	75	115	20	1.1	1.1	0.71	26.50	29.00	15000	24000					
QHS7015E	75	115	20	1.1	1.1	0.71	25.00	27.00	13000	20000					
QHC7015C	75	115	20	1.1	1.1	0.66	18.30	20.00	17000	28000					
QHC7015E	75	115	20	1.1	1.1	0.66	17.30	18.60	15000	24000					
QXC7015C	75	115	20	1.1	1.1	0.66	40.50	20.00	22000	36000					
QXC7015E	75	115	20	1.1	1.1	0.66	38.00	18.60	19000	32000					
QB7215C	75	130	25	1.5	1.5	1.21	72.00	63.00	11000	18000					
QB7215E	75	130	25	1.5	1.5	1.21	68.00	60.00	9500	16000					
QHCB7215C	75	130	25	1.5	1.5	1.05	50.00	44.00	14000	22000					
QHCB7215E	75	130	25	1.5	1.5	1.05	47.50	41.50	12000	19000					
QB71816C	80	100	10	0.6	0.3	0.15	14.60	16.60	12000	19000					
QB71816E	80	100	10	0.6	0.3	0.15	13.70	15.60	11000	18000					
QHCB71816C	80	100	10	0.6	0.3	0.15	10.00	11.60	16000	26000					
QHCB71816E	80	100	10	0.6	0.3	0.15	9.50	10.80	13000	20000					
QB71916C	80	110	16	1.0	1.0	0.37	34.50	36.00	12000	19000					
QB71916E	80	110	16	1.0	1.0	0.37	32.50	34.00	11000	18000					
QHCB71916C	80	110	16	1.0	1.0	0.31	24.00	25.00	15000	24000					
QHCB71916E	80	110	16	1.0	1.0	0.31	22.40	23.60	13000	20000					
Qxcb71916C	80	110	16	1.0	1.0	0.31	54.00	25.00	19000	32000					
Qxcb71916E	80	110	16	1.0	1.0	0.31	50.00	23.60	16000	26000					

*Customized bearings are supplied according to your requirements.

*The listed models and sizes are for reference only, for detailed specifications, please contact our sales department.

*Customized bearings are supplied according to your requirements.

*The listed models and sizes are for reference only, for detailed specifications, please contact our sales department.

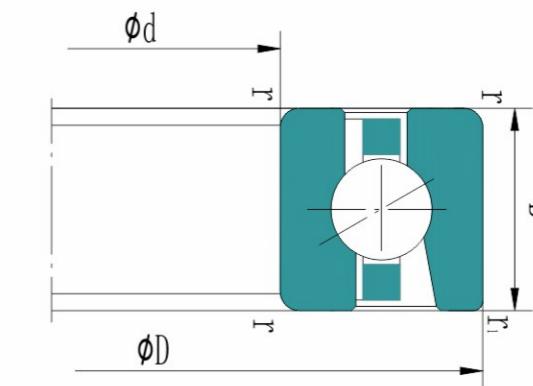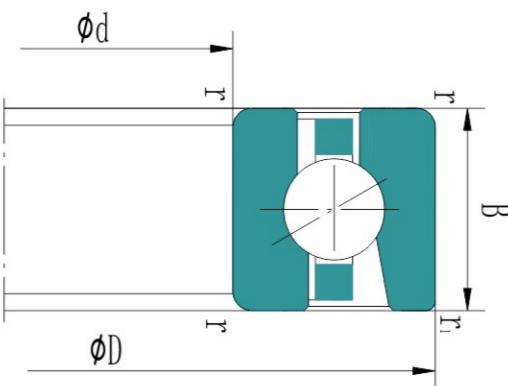



Model	Inner diameter	Outer diameter	Width	Chamfer	Mass	Load capacity		Available speed			
						d [mm]	D [mm]	B [mm]	r [mm]	r1 [mm]	M [kg]
Qxcb71917C	85	120	18	1.1	1.1	0.45	69.50	32.50	18000	30000	
Qxcb71917E	85	120	18	1.1	1.1	0.45	64.00	30.50	15000	24000	
Qhs71917C	85	120	18	1.1	1.1	0.61	22.00	26.00	14000	22000	
Qhs71917E	85	120	18	1.1	1.1	0.61	20.40	24.50	12000	19000	
Qhc71917C	85	120	18	1.1	1.1	0.57	15.00	18.00	16000	26000	
Qhc71917E	85	120	18	1.1	1.1	0.57	14.30	17.00	13000	20000	
Qxc71917C	85	120	18	1.1	1.1	0.57	33.50	18.00	20000	34000	
Qxc71917E	85	120	18	1.1	1.1	0.57	32.00	17.00	17000	28000	
QB7017C	85	130	22	1.1	1.1	0.89	65.50	62.00	10000	17000	
QB7017E	85	130	22	1.1	1.1	0.89	62.00	58.50	9000	15000	
Qhcb7017C	85	130	22	1.1	1.1	0.74	45.00	43.00	13000	20000	
Qhcb7017E	85	130	22	1.1	1.1	0.74	42.50	40.50	11000	18000	
Qxcb7017C	85	130	22	1.1	1.1	0.74	100.00	43.00	17000	28000	
Qxcb7017E	85	130	22	1.1	1.1	0.74	95.00	40.50	14000	22000	
Qhs7017C	85	130	22	1.1	1.1	0.99	32.00	36.00	13000	20000	
Qhs7017E	85	130	22	1.1	1.1	0.99	30.00	33.50	11000	18000	
Qhc7017C	85	130	22	1.1	1.1	0.92	22.00	25.00	15000	24000	
Qhc7017E	85	130	22	1.1	1.1	0.93	20.80	23.20	13000	20000	
Qxc7017C	85	130	22	1.1	1.1	0.92	49.00	25.00	19000	32000	
Qxc7017E	85	130	22	1.1	1.1	0.93	46.50	23.20	16000	26000	
QB7217C	85	150	28	2.0	2.0	1.85	96.50	85.00	9000	15000	
QB7217E	85	150	28	2.0	2.0	1.85	91.50	80.00	8000	13000	
Qhcb7217C	85	150	28	2.0	2.0	1.58	67.00	58.50	11000	18000	
Qhcb7217E	85	150	28	2.0	2.0	1.58	63.00	56.00	10000	17000	
QB71818C	90	115	13	1.0	0.3	0.28	21.20	23.60	11000	18000	
QB71818E	90	115	13	1.0	0.3	0.28	20.00	22.00	9500	16000	
Qhcb71818C	90	115	13	1.0	0.3	0.28	14.60	16.60	14000	22000	
Qhcb71818E	90	115	13	1.0	0.3	0.28	14.00	15.30	12000	19000	
QB71918C	90	125	18	1.1	1.1	0.55	45.50	49.00	10000	17000	
QB71918E	90	125	18	1.1	1.1	0.55	43.00	46.50	9000	15000	

*Customized bearings are supplied according to your requirements.

*The listed models and sizes are for reference only, for detailed specifications, please contact our sales department.

*Customized bearings are supplied according to your requirements.

*The listed models and sizes are for reference only, for detailed specifications, please contact our sales department.

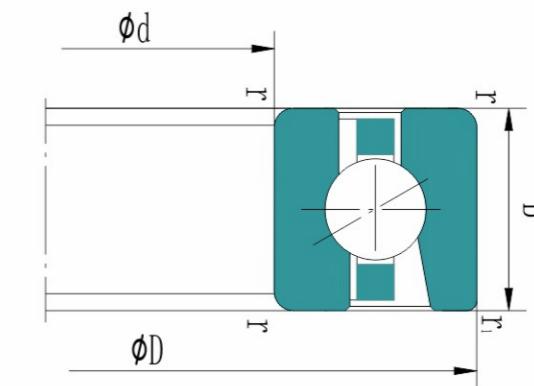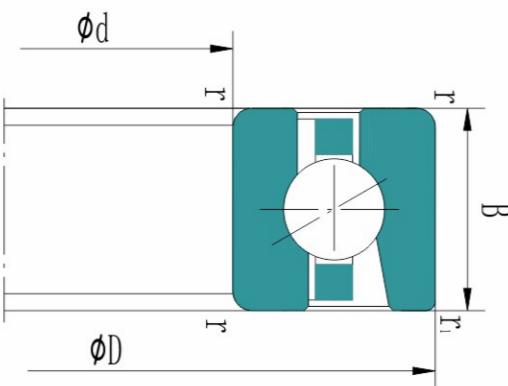



Model	Inner diameter	Outer diameter	Width	Chamfer	Mass	Load capacity		Available speed			
						d [mm]	D [mm]	B [mm]	r [mm]	r1 [mm]	M [kg]
QB71919C	95	130	18	1.1	1.1	0.58	46.50	51.00	9500	16000	
QB71919E	95	130	18	1.1	1.1	0.58	44.00	48.00	8500	14000	
QHCB71919C	95	130	18	1.1	1.1	0.49	32.00	35.50	12000	19000	
QHCB71919E	95	130	18	1.1	1.1	0.49	30.50	33.50	10000	17000	
QXCB71919C	95	130	18	1.1	1.1	0.49	71.00	35.50	16000	26000	
QXCB71919E	95	130	18	1.1	1.1	0.49	68.00	33.50	14000	22000	
QHS71919C	95	130	18	1.1	1.1	0.66	24.50	30.00	12000	19000	
QHS71919E	95	130	18	1.1	1.1	0.66	22.80	28.00	10000	17000	
QHC71919C	95	130	18	1.1	1.1	0.61	17.00	20.80	14000	22000	
QHC71919E	95	130	18	1.1	1.1	0.61	16.00	19.30	12000	19000	
QXC71919C	95	130	18	1.1	1.1	0.61	38.00	20.80	18000	30000	
QXC71919E	95	130	18	1.1	1.1	0.61	35.50	19.30	16000	26000	
QB7019C	95	145	24	1.5	1.5	1.20	78.00	76.50	9000	15000	
QB7019E	95	145	24	1.5	1.5	1.20	75.00	72.00	8000	13000	
QHCB7019C	95	145	24	1.5	1.5	1.01	54.00	53.00	11000	18000	
QHCB7019E	95	145	24	1.5	1.5	1.01	51.00	51.00	9500	16000	
QXCB7019C	95	145	24	1.5	1.5	1.01	120.00	53.00	15000	24000	
QXCB7019E	95	145	24	1.5	1.5	1.01	114.00	51.00	13000	20000	
QHS7019C	95	145	24	1.5	1.5	1.34	38.00	44.00	11000	18000	
QHS7019E	95	145	24	1.5	1.5	1.34	35.50	41.50	9500	16000	
QHC7019C	95	145	24	1.5	1.5	1.24	26.00	31.00	13000	20000	
QHC7019E	95	145	24	1.5	1.5	1.25	24.50	28.50	11000	18000	
QXC7019C	95	145	24	1.5	1.5	1.24	58.50	31.00	17000	28000	
QXC7019E	95	145	24	1.5	1.5	1.25	55.00	28.50	14000	22000	
QB7219C	95	170	32	2.1	2.1	2.78	127.00	114.00	8000	13000	
QB7219E	95	170	32	2.1	2.1	2.78	122.00	108.00	7000	11000	
QHCB7219C	95	170	32	2.1	2.1	2.36	88.00	80.00	10000	17000	
QHCB7219E	95	170	32	2.1	2.1	2.36	83.00	75.00	8500	14000	
QB71820C	100	125	13	1.0	0.3	0.30	21.60	25.00	9500	16000	
QB71820E	100	125	13	1.0	0.3	0.30	20.40	23.60	8500	14000	

*Customized bearings are supplied according to your requirements.

*The listed models and sizes are for reference only, for detailed specifications, please contact our sales department.

*Customized bearings are supplied according to your requirements.



*The listed models and sizes are for reference only, for detailed specifications, please contact our sales department.

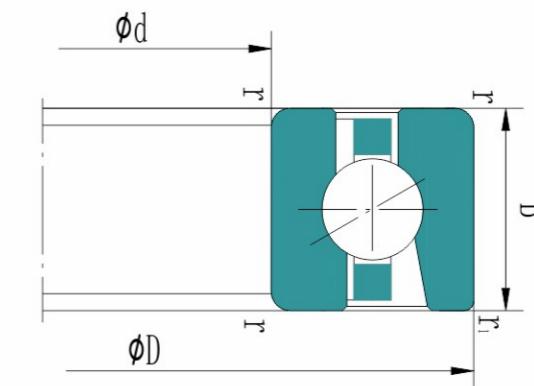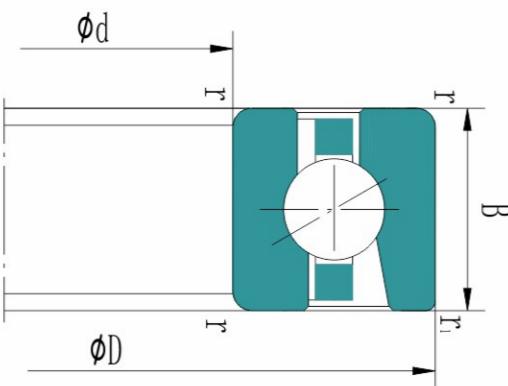

Model	Inner diameter	Outer diameter	Width	Chamfer	Mass	Load capacity		Available speed							
						d [mm]	D [mm]	B [mm]	r [mm]	r1 [mm]	M [kg]	Dynamic [kN]	Static [kN]	Lubrication rpm	Oil rpm
QB71821 C	105	130	13	1.0	0.3	0.3	22.80	27.50	9000	15000					
QB71821 E	105	130	13	1.0	0.3	0.3	21.60	25.50	8000	13000					
QHCB71821 C	105	130	13	1.0	0.3	0.3	15.60	19.00	12000	19000					
QHCB71821E	105	130	13	1.0	0.3	0.3	15.00	18.00	10000	17000					
QB71921C	105	145	20	1.1	1.1	0.8	58.50	64.00	8500	14000					
QB71921E	105	145	20	1.1	1.1	0.8	55.00	60.00	7500	12000					
QHCB71921C	105	145	20	1.1	1.1	0.7	40.00	45.00	11000	18000					
QHCB71921E	105	145	20	1.1	1.1	0.7	38.00	42.50	9000	15000					
Qxcb71921C	105	145	20	1.1	1.1	0.7	90.00	45.00	14000	22000					
Qxcb71921E	105	145	20	1.1	1.1	0.7	85.00	42.50	12000	19000					
QHS71921C	105	145	20	1.1	1.1	0.9	30.00	38.00	11000	18000					
QHS71921E	105	145	20	1.1	1.1	0.9	28.00	35.50	9000	15000					
QHC71921C	105	145	20	1.1	1.1	0.9	20.80	26.50	12000	19000					
QHC71921E	105	145	20	1.1	1.1	0.9	19.60	24.50	11000	18000					
QXC71921C	105	145	20	1.1	1.1	0.9	46.50	26.50	16000	26000					
QXC71921E	105	145	20	1.1	1.1	0.9	44.00	24.50	14000	22000					
QB7021C	105	160	26	2.0	2.0	1.6	106.00	102.00	8000	13000					
QB7021E	105	160	26	2.0	2.0	1.6	102.00	98.00	7000	11000					
QHCB7021C	105	160	26	2.0	2.0	1.3	73.50	72.00	10000	17000					
QHCB7021E	105	160	26	2.0	2.0	1.3	69.50	68.00	8500	14000					
Qxcb7021C	105	160	26	2.0	2.0	1.3	163.00	72.00	13000	20000					
Qxcb7021E	105	160	26	2.0	2.0	1.3	156.00	68.00	11000	18000					
QHS7021C	105	160	26	2.0	2.0	1.8	49.00	58.50	10000	17000					
QHS7021E	105	160	26	2.0	2.0	1.8	46.50	54.00	8500	14000					
QHC7021C	105	160	26	2.0	2.0	1.6	34.00	40.50	12000	19000					
QHC7021E	105	160	26	2.0	2.0	1.6	32.00	38.00	10000	17000					
QXC7021C	105	160	26	2.0	2.0	1.6	76.50	40.50	15000	24000					
QXC7021E	105	160	26	2.0	2.0	1.6	71.00	38.00	13000	21000					
QB7221C	105	190	36	2.1	2.1	4.0	163.00	146.00	7000	11000					
QB7221E	105	190	36	2.1	2.1	4.0	156.00	140.00	6300	9500					

*Customized bearings are supplied according to your requirements.
*The listed models and sizes are for reference only, for detailed specifications, please contact our sales department.

*Customized bearings are supplied according to your requirements.
*The listed models and sizes are for reference only, for detailed specifications, please contact our sales department.

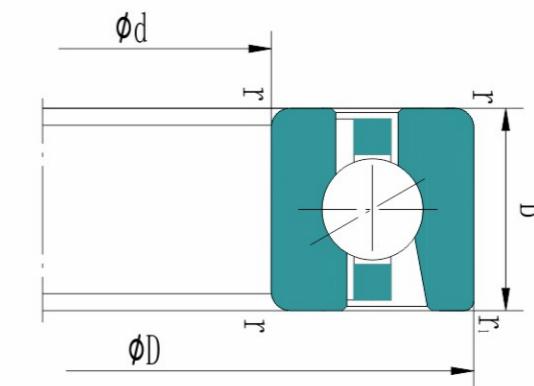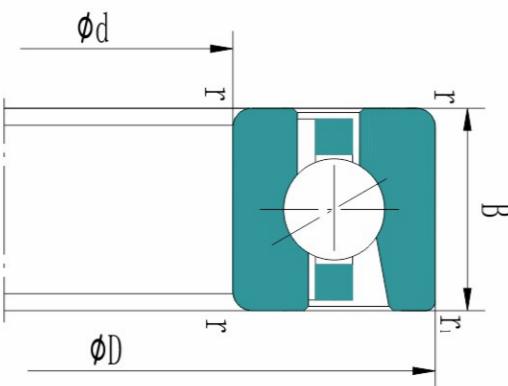



Model	Inner diameter	Outer diameter	Width	Chamfer	Mass	Load capacity		Available speed			
						d [mm]	D [mm]	B [mm]	r [mm]	r1 [mm]	M [kg]
QB7222C	110	200	38	2.1	2.1	4.7	163.00	150.00	6700	10000	
QB7222E	110	200	38	2.1	2.1	4.7	153.00	143.00	6000	9000	
QHCB7222C	110	200	38	2.1	2.1	4.0	112.00	104.00	8500	14000	
QHCB7222E	110	200	38	2.1	2.1	4.0	106.00	98.00	7000	11000	
QB71824C	120	150	16	1.0	0.3	0.5	32.00	39.00	7500	12000	
QB71824E	120	150	16	1.0	0.3	0.5	30.00	36.00	7000	11000	
QHCB71824C	120	150	16	1.0	0.3	0.5	22.00	27.00	10000	17000	
QHCB71824E	120	150	16	1.0	0.3	0.5	20.80	25.00	8500	14000	
QB71924C	120	165	22	1.1	1.1	1.2	73.50	85.00	7000	11000	
QB71924E	120	165	22	1.1	1.1	1.2	69.50	80.00	6700	10000	
QHCB71924C	120	165	22	1.1	1.1	1.0	51.00	58.50	9000	15000	
QHCB71924E	120	165	22	1.1	1.1	1.0	48.00	55.00	8000	13000	
QXCB71924C	120	165	22	1.1	1.1	1.0	114.00	58.50	12000	19000	
QXCB71924E	120	165	22	1.1	1.1	1.0	108.00	55.00	10000	17000	
QHS71924C	120	165	22	1.1	1.1	1.3	36.50	48.00	9000	15000	
QHS71924E	120	165	22	1.1	1.1	1.3	34.00	45.00	8000	13000	
QHC71924C	120	165	22	1.1	1.1	1.3	25.00	33.50	11000	18000	
QHC71924E	120	165	22	1.1	1.1	1.3	23.60	31.00	9000	15000	
QXC71924C	120	165	22	1.1	1.1	1.3	56.00	33.50	14000	22000	
QXC71924E	120	165	22	1.1	1.1	1.3	53.00	31.00	12000	19000	
QB7024C	120	180	28	2.0	2.0	2.1	112.00	116.00	6700	10000	
QB7024E	120	180	28	2.0	2.0	2.1	106.00	110.00	6300	9500	
QHCB7024C	120	180	28	2.0	2.0	1.8	78.00	81.50	8500	14000	
QHCB7024E	120	180	28	2.0	2.0	1.8	73.50	76.50	7500	12000	
QXCB7024C	120	180	28	2.0	2.0	1.8	173.00	81.50	11000	18000	
QXCB7024E	120	180	28	2.0	2.0	1.8	163.00	76.50	9500	16000	
QHS7024C	120	180	28	2.0	2.0	2.3	51.00	63.00	8500	14000	
QHS7024E	120	180	28	2.0	2.0	2.3	48.00	58.50	7500	12000	
QHC7024C	120	180	28	2.0	2.0	2.1	35.50	44.00	10000	17000	
QHC7024E	120	180	28	2.0	2.0	2.1	33.50	41.50	8500	14000	

*Customized bearings are supplied according to your requirements.

*The listed models and sizes are for reference only, for detailed specifications, please contact our sales department.

*Customized bearings are supplied according to your requirements.

*The listed models and sizes are for reference only, for detailed specifications, please contact our sales department.

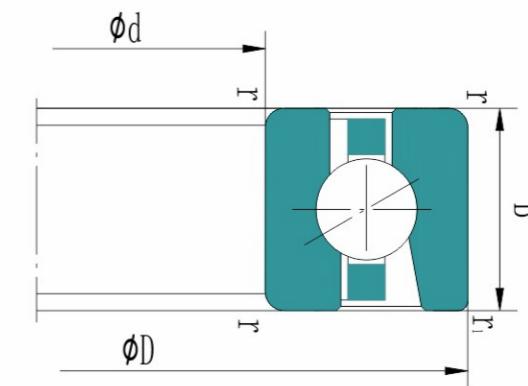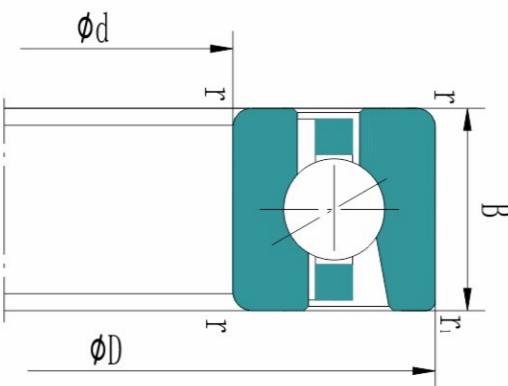



Model	Inner diameter	Outer diameter	Width	Chamfer	Mass	Load capacity		Available speed			
						d [mm]	D [mm]	B [mm]	r [mm]	r1 [mm]	M [kg]
QHC7026C	130	200	33	2.0	2.0	3.5	45.50	58.50	9000	15000	
QHC7026E	130	200	33	2.0	2.0	3.5	42.50	54.00	7500	12000	
QXC7026C	130	200	33	2.0	2.0	3.5	102.00	58.50	12000	19000	
QXC7026E	130	200	33	2.0	2.0	3.5	95.00	54.00	10000	17000	
QB7226C	130	230	40	3.0	3.0	6.3	212.00	216.00	5600	8500	
QB7226E	130	230	40	3.0	3.0	6.3	204.00	204.00	5000	7500	
QHCB7226C	130	230	40	3.0	3.0	5.2	146.00	150.00	7000	11000	
QHCB7226E	130	230	40	3.0	3.0	5.2	140.00	143.00	6000	9000	
QB71828C	140	175	18	1.1	0.6	0.8	43.00	54.00	6300	9500	
QB71828E	140	175	18	1.1	0.6	0.8	40.50	51.00	6000	9000	
QHCB71828C	140	175	18	1.1	0.6	0.8	30.00	38.00	8000	13000	
QHCB71828E	140	175	18	1.1	0.6	0.8	28.00	35.50	7000	11000	
QB71928C	140	190	24	1.5	1.5	1.6	90.00	108.00	6000	9000	
QB71928E	140	190	24	1.5	1.5	1.6	85.00	102.00	5600	8500	
QHCB71928C	140	190	24	1.5	1.5	1.4	62.00	76.50	7500	12000	
QHCB71928E	140	190	24	1.5	1.5	1.4	58.50	71.00	6700	10000	
QXCB71928C	140	190	24	1.5	1.5	1.4	137.00	76.50	10000	17000	
QXCB71928E	140	190	24	1.5	1.5	1.4	129.00	71.00	8500	14000	
QB7028C	140	210	33	2.0	2.0	3.4	146.00	160.00	5600	8500	
QB7028E	140	210	33	2.0	2.0	3.4	140.00	150.00	5000	7500	
QHCB7028C	140	210	33	2.0	2.0	2.8	102.00	110.00	7000	11000	
QHCB7028E	140	210	33	2.0	2.0	2.8	96.50	104.00	6300	9500	
QXCB7028C	140	210	33	2.0	2.0	2.8	228.00	110.00	9500	16000	
QXCB7028E	140	210	33	2.0	2.0	2.8	216.00	104.00	8000	13000	
QB7228C	140	250	42	3.0	3.0	8.1	220.00	232.00	5000	7500	
QB7228E	140	250	42	3.0	3.0	8.1	212.00	224.00	4500	6700	
QHCB7228C	140	250	42	3.0	3.0	6.8	153.00	163.00	6300	9500	
QHCB7228E	140	250	42	3.0	3.0	6.8	146.00	156.00	5300	8000	
QB71830C	150	190	20	1.1	0.6	1.1	56.00	69.50	6000	9000	
QB71830E	150	190	20	1.1	0.6	1.1	52.00	64.00	5300	8000	

*Customized bearings are supplied according to your requirements.

*The listed models and sizes are for reference only, for detailed specifications, please contact our sales department.

*Customized bearings are supplied according to your requirements.

*The listed models and sizes are for reference only, for detailed specifications, please contact our sales department.

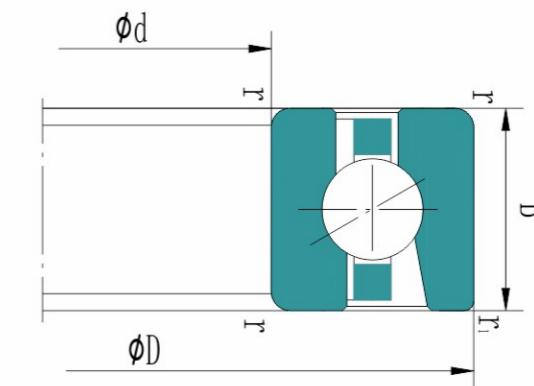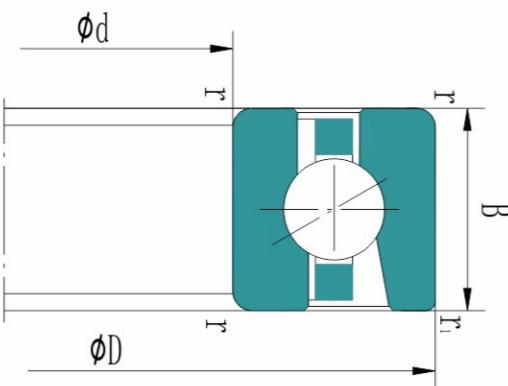


Model	Inner diameter	Outer diameter	Width	Chamfer	Mass	Load capacity			Available speed					
						d [mm]	D [mm]	B [mm]	r [mm]	r1 [mm]	M [kg]	Dynamic [kN]	Static [kN]	Lubrication rpm
QHCB7032C	160	240	38	2.1	2.1	4.3	129.00	143.00	6000	9000				
QHCB7032E	160	240	38	2.1	2.1	4.3	122.00	137.00	5300	8000				
QXCB7032C	160	240	38	2.1	2.1	4.3	290.00	143.00	8000	13000				
QXCB7032E	160	240	38	2.1	2.1	4.3	270.00	137.00	6700	10000				
QB7232C	160	290	48	3.0	3.0	13.0	245.00	285.00	4300	6300				
QB7232E	160	290	48	3.0	3.0	13.0	232.00	270.00	3800	5600				
QHCB7232C	160	290	48	3.0	3.0	11.6	170.00	200.00	5300	8000				
QHCB7232E	160	290	48	3.0	3.0	11.6	160.00	190.00	4500	6700				
QB71834C	170	215	22	1.1	0.6	1.6	68.00	88.00	5000	7500				
QB71834E	170	215	22	1.1	0.6	1.6	64.00	81.50	4500	6700				
QHCB71834C	170	215	22	1.1	0.6	1.6	47.50	61.00	6300	9500				
QHCB71834E	170	215	22	1.1	0.6	1.6	45.00	57.00	5600	8500				
QB71934C	170	230	28	2.0	1.5	2.8	129.00	163.00	4800	7000				
QB71934E	170	230	28	2.0	1.5	2.8	122.00	150.00	4500	6700				
QHCB71934C	170	230	28	2.0	1.5	2.4	88.00	114.00	6000	9000				
QHCB71934E	170	230	28	2.0	1.5	2.4	83.00	106.00	5300	8000				
QB7034C	170	260	42	2.1	2.1	6.7	236.00	270.00	4500	6700				
QB7034E	170	260	42	2.1	2.1	6.7	224.00	255.00	4000	6000				
QB7234C	170	310	52	4.0	4.0	16.0	300.00	360.00	4000	6000				
QB7234E	170	310	52	4.0	4.0	16.0	280.00	345.00	3600	5300				
QB71836C	180	225	22	1.1	0.6	1.7	71.00	93.00	4800	7000				
QB71836E	180	225	22	1.1	0.6	1.7	67.00	86.50	4300	6300				
QHCB71836C	180	225	22	1.1	0.6	1.7	49.00	65.50	6000	9000				
QHCB71836E	180	225	22	1.1	0.6	1.7	45.50	60.00	5300	8000				
QB71936C	180	250	33	2.0	1.0	4.2	163.00	204.00	4500	6700				
QB71936E	180	250	33	2.0	1.0	4.2	156.00	193.00	4000	6000				
QHCB71936C	180	250	33	2.0	1.0	3.5	114.00	143.00	5600	8500				
QHCB71936E	180	250	33	2.0	1.0	3.5	106.00	134.00	4800	7000				
QB7036C	180	280	46	2.1	2.1	8.9	245.00	285.00	4000	6000				
QB7036E	180	280	46	2.1	2.1	8.9	232.00	275.00	3800	5600				

*Customized bearings are supplied according to your requirements.

*The listed models and sizes are for reference only, for detailed specifications, please contact our sales department.


*Customized bearings are supplied according to your requirements.

*The listed models and sizes are for reference only, for detailed specifications, please contact our sales department.


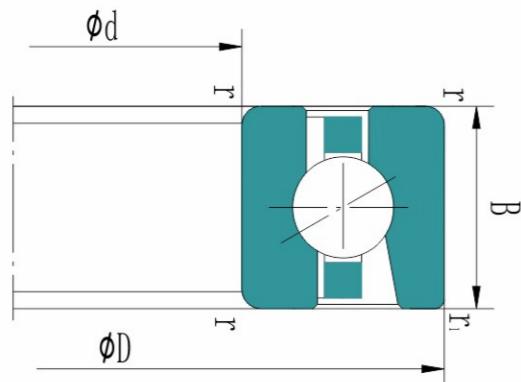


Model	Inner diameter	Outer diameter	Width	Chamfer	Mass	Load capacity			Available speed					
						d [mm]	D [mm]	B [mm]	r [mm]	r1 [mm]	M [kg]	Dynamic [kN]	Static [kN]	Lubrication rpm
QB71944C	220	300	38	2.1	1.1	6.7	216.00	285.00	3600	5300				
QB71944E	220	300	38	2.1	1.1	6.7	204.00	270.00	3200	4800				
QHCB71944C	220	300	38	2.1	1.1	5.6	150.00	200.00	4500	6700				
QHCB71944E	220	300	38	2.1	1.1	5.6	140.00	190.00	3800	5600				
QB7044C	220	340	56	3.0	3.0	16.0	325.00	440.00	3200	4800				
QB7044E	220	340	56	3.0	3.0	16.0	310.00	415.00	3000	4500				
QB7244C	220	400	65	4.0	4.0	33.6	400.00	560.00	2800	4300				
QB7244E	220	400	65	4.0	4.0	33.6	380.00	540.00	2600	4000				
QB71848C	240	300	28	2.0	1.0	3.9	106.00	150.00	3400	5000				
QB71848E	240	300	28	2.0	1.0	3.9	98.00	140.00	3000	4500				
QHCB71848C	240	300	28	2.0	1.0	3.9	72.00	104.00	4300	6300				
QHCB71848E	240	300	28	2.0	1.0	3.9	68.00	96.50	3600	5300				
QB71948C	240	320	38	2.1	1.1	7.2	224.00	310.00	3200	4800				
QB71948E	240	320	38	2.1	1.1	7.2	212.00	285.00	3000	4500				
QHCB71948C	240	320	38	2.1	1.1	6.0	153.00	216.00	4000	6000				
QHCB71948E	240	320	38	2.1	1.1	6.0	146.00	200.00	3600	5300				
QB7048C	240	360	56	3.0	3.0	17.0	335.00	465.00	3000	4500				
QB7048E	240	360	56	3.0	3.0	17.0	315.00	440.00	2800	4300				
QB71952C	260	360	46	2.1	1.1	12.1	285.00	415.00	3000	4500				
QB71952E	260	360	46	2.1	1.1	12.1	270.00	390.00	2600	4000				
QB71956C	280	380	46	2.1	1.1	12.9	300.00	450.00	2600	4000				
QB71956E	280	380	46	2.1	1.1	12.9	280.00	425.00	2400	3800				
QB71960C	300	420	56	3.0	1.1	20.4	360.00	570.00	2400	3800				
QB71960E	300	420	56	3.0	1.1	20.4	340.00	540.00	2200	3600				
QB71964C	320	440	56	3.0	1.1	21.6	375.00	620.00	2200	3600				
QB71964E	320	440	56	3.0	1.1	21.6	355.00	585.00	2000	3400				
QB71968C	340	460	56	3.0	1.1	22.7	380.00	640.00	2200	3600				
QB71968E	340	460	56	3.0	1.1	22.7	360.00	610.00	1900	3200				
QB71972C	360	480	56	3.0	1.1	23.9	390.00	695.00	2000	3400				
QB71972E	360	480	56	3.0	1.1	23.9	375.00	640.00	1800	3000				

*Customized bearings are supplied according to your requirements.
*The listed models and sizes are for reference only, for detailed specifications, please contact our sales department.

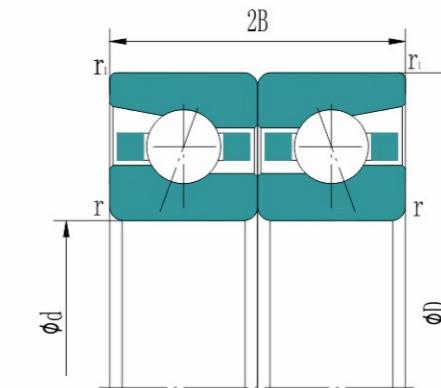

Model	Inner diameter	Outer diameter	Width	Chamfer	Mass	Load capacity			Available speed			
						d [mm]	D [mm]	2B [mm]	r [mm]	r1 [mm]	M [kg]	Dynamic [kN]
Q50BAR10S	50	80	28.5	1	0.6	0.272			14.7	27.7	11600	14700
Q50BAR10H	50	80	28.5	1	0.6	0.257			14.7	27.7	13100	16200
Q50BTR10S	50	80	28.5	1	0.6	0.272			17.4	31.5	10000	13100
Q50BTR10H	50	80	28.5	1	0.6	0.257			17.4	31.5	11600	14700
Q55BAR10S	55	90	33	1.1	0.6	0.412			18.2	35	10400	13200
Q55BAR10H	55	90	33	1.1	0.6	0.391			18.2	35	11800	14500
Q55BTR10S	55	90	33	1.1	0.6	0.412			21.6	40	9000	11800
Q55BTR10H	55	90	33	1.1	0.6	0.391			21.6	40	10400	13200
Q60BAR10S	60	95	33	1.1	0.6	0.42			18.9	38	9700	12300
Q60BAR10H	60	95	33	1.1	0.6	0.397			18.9	38	11000	13600
Q60BTR10S	60	95	33	1.1	0.6	0.42			22.4	43.5	8400	11000
Q60BTR10H	60	95	33	1.1	0.6	0.397			22.4	43.5	9700	12300
Q65BAR10S	65	100	33	1.1	0.6	0.447			19.5	41.5	9100	11600
Q65BAR10H	65	100	33	1.1	0.6	0.406			19.5	41.5	10400	12800
Q65BTR10S	65	100	33	1.1	0.6	0.447			23.1	47	7900	10400
Q65BTR10H	65	100	33	1.1	0.6	0.406			23.1	47	9100	11600
Q70BAR10S	70	110	36	1.1	0.6	0.601			26.9	55	8400	10600
Q70BAR10H	70	110	36	1.1	0.6	0.561			26.9	55	9500	11700
Q70BTR10S	70	110	36	1.1	0.6	0.601			32	63	7300	9500
Q70BTR10H	70	110	36	1.1	0.6	0.561			32	63	8400	10600
Q75BAR10S	75	115	36	1.1	0.6	0.634			27.3	58	7900	10000
Q75BAR10H	75	11										

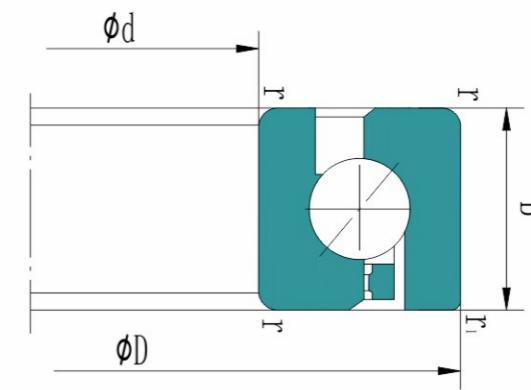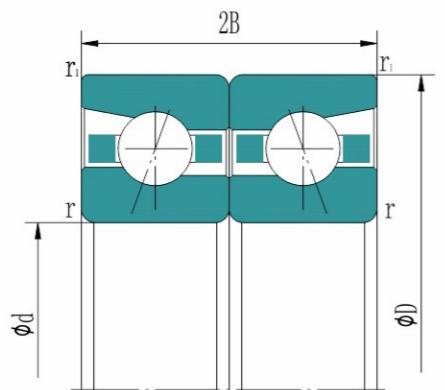


Model	Inner diameter	Outer diameter	Width	Chamfer	Mass	Load capacity			Available speed					
						d [mm]	D [mm]	2B [mm]	r [mm]	r1 [mm]	M [kg]	Dynamic [kN]	Static [kN]	Lubrication rpm
Q85BTR10S	85	130	40.5	1.1	0.6	0.971			38.5	81.5	6100	8000		
Q85BTR10H	85	130	40.5	1.1	0.6	0.915			38.5	81.5	7000	8900		
Q90BAR10S	90	140	45	1.5	1	1.198			42.5	92.5	6600	8300		
Q90BAR10H	90	140	45	1.5	1	1.124			42.5	92.5	7400	9200		
Q90BTR10S	90	140	45	1.5	1	1.198			50	105.0	5700	7400		
Q90BTR10H	90	140	45	1.5	1	1.124			50	105.0	6600	8300		
Q95BAR10S	95	145	45	1.5	1	1.32			43	96.5	6300	8000		
Q95BAR10H	95	145	45	1.5	1	1.231			43	96.5	7100	8800		
Q95BTR10S	95	145	45	1.5	1	1.32			51	110.0	5500	7100		
Q95BTR10H	95	145	45	1.5	1	1.231			51	110.0	6300	8000		
Q100BAR10S	100	150	45	1.5	1	1.399			43.5	100.0	6000	7600		
Q100BAR10H	100	150	45	1.5	1	1.307			43.5	100.0	6800	8400		
Q100BTR10S	100	150	45	1.5	1	1.399			51.5	114.0	5200	6800		
Q100BTR10H	100	150	45	1.5	1	1.307			51.5	114.0	6000	7600		
Q105BAR10S	105	160	49.5	2	1	1.74			49.5	115.0	5700	7200		
Q105BAR10H	105	160	49.5	2	1	1.624			49.5	115.0	6500	8000		
Q105BTR10S	105	160	49.5	2	1	1.74			58.5	131.0	5000	6500		
Q105BTR10H	105	160	49.5	2	1	1.624			58.5	131.0	5700	7200		



*Customized bearings are supplied according to your requirements.
*The listed models and sizes are for reference only, for detailed specifications, please contact our sales department.

*Customized bearings are supplied according to your requirements.
*The listed models and sizes are for reference only, for detailed specifications, please contact our sales department.

QTAC B SERIES

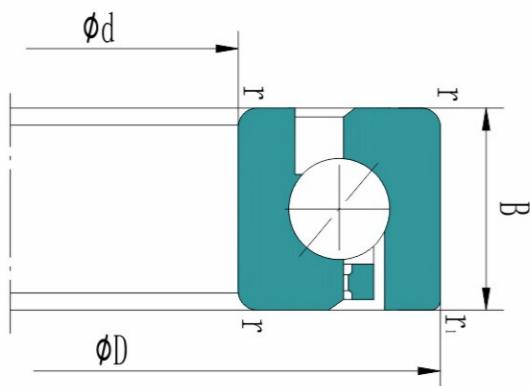

LOW NOISE HIGH PRECISION SERIES

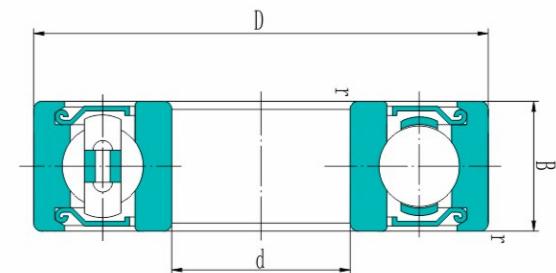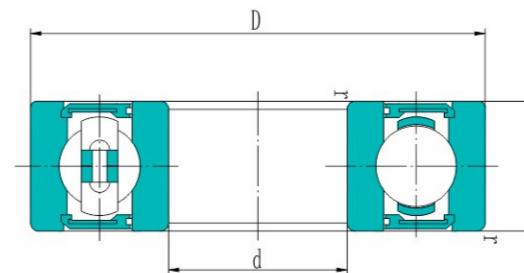

2RZ

2Z


Model	Inner diameter	Outer diameter	Width	Chamfer		Available speed	
				d [mm]	D [mm]	B [mm]	r [mm]
Q15TAC02AT85	15	35	11	0.6	0.3	8000	10000
Q25TAC02AT85	25	52	15	1	0.6	5100	7000
QTAC35-2T85	35	90	23	1.5	1	3000	4100
Q40TAC03AT85	40	90	23	1.5	1	3000	4100
Q45TAC03AT85	45	100	25	1.5	1	2700	3700
QTAC45-2T85	45	110	27	2	1	2500	3300
Q50TAC03AT85	50	110	27	2	1	2500	3300
Q55TAC03AT85	55	120	29	2	1	2200	3000
Q60TAC03AT85	60	130	31	2.1	1.1	2100	2800
Q80TAC03AM	80	170	39	2.1	1.1	1500	2100
Q100TAC03CMC	100	215	47	3	1.1	1200	1600
Q120TAC03CMC	120	260	55	3	1.1	1000	1300

Model	Inner diameter	Outer diameter	Width	Chamfer	Weight		Load capacity		Limiting speed
					d [mm]	D [mm]	B [mm]	r [mm]	M [kg]
6000-2z	10	26	8	0.3	0.019	4.75	1.96	34000	
6000-2rz	10	26	8	0.3	0.019	4.55	1.96	28000	
6001-2z	12	28	8	0.3	0.02	5.4	2.36	30000	
6001-2rz	12	28	8	0.3	0.02	5.1	2.36	26000	
6002-2z	15	32	9	0.3	0.031	5.85	2.85	26000	
6002-2rz	15	32	9	0.3	0.031	5.6	2.85	24000	
6003-2z	17	35	10	0.3	0.038	6.37	3.25	22000	
6003-2rz	17	35	10	0.3	0.038	6	3.25	22000	
6004-2z	20	42	12	0.6	0.068	9.95	5	19000	
6004-2rz	20	42	12	0.6	0.068	9	5	17000	
6005-2z	25	47	12	0.6	0.08	11.9	6.55	16000	
6005-2rz	25	47	12	0.6	0.08	10	5.85	15000	
6006-2z	30	55	13	1	0.122	13.8	8.3	14000	
6006-2rz	30	55	13	1	0.122	12.7	8	13000	
6007-2z	35	62	14	1	0.157	16.8	10.2	12000	
6007-2rz	35	62	14	1	0.157	16	10.2	11000	
6008-2z	40	68	15	1	0.194	17.8	11	11000	
6008-2rz	40	68	15	1	0.194	16.6	11.6	10000	
6009-2z	45	75	16	1	0.247	22.1	14.6	10000	
6009-2rz	45	75	16	1	0.247	20	14.3	9000	
6010-2z	50	80	16	1	0.272	22.9	15.6	9000	
6010-2rz	50	80	16	1	0.272	20.8	15.6	8500	
6200-2z	10	30	9	0.6	0.031	5.4	2.36	28000	
6200-2rz	10	30	9	0.6	0.031	6	2.6	26000	
6201-2z	12	32	10	0.6	0.037	7.28	3.1	26000	
6201-2rz	12	32	10	0.6	0.037	6.95	3.1	24000	
6202-2z	15	35	11	0.6	0.043	8.06	3.75	22000	
6202-2rz	15	35	11	0.6	0.043	7.8	3.75	20000	
6203-2z	17	40	12	0.6	0.065	9.95	4.75	19000	
6203-2rz	17	40	12	0.6	0.065	9.5	4.75	18000	


*Customized bearings are supplied according to your requirements.
*The listed models and sizes are for reference only, for detailed specifications, please contact our sales department.

*Customized bearings are supplied according to your requirements.
*The listed models and sizes are for reference only, for detailed specifications, please contact our sales department.

LOW NOISE HIGH PRECISION SERIES

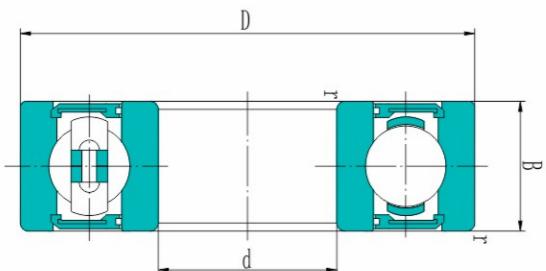

2RZ

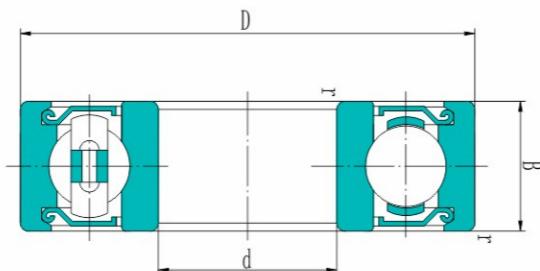


2Z

Model	Inner diameter	Outer diameter	Width	Chamfer	Weight	Load capacity		Limiting speed
	d [mm]	D [mm]	B [mm]	r [mm]	M [kg]	Dynamic [kN]	Static [kN]	
6204-2z	20	47	14	1	0.105	13.5	6.55	17000
6204 -2rz	20	47	14	1	0.105	12.7	6.55	15000
6205-2z	25	52	15	1	0.128	14.8	7.8	14000
6205 -2rz	25	52	15	1	0.128	14	7.8	14000
6206-2z	30	62	16	1	0.195	20.3	11.2	12000
6206 -2rz	30	62	16	1	0.195	19.3	11.2	11000
6207-2z	35	72	17	1.1	0.291	27	15.3	10000
6207 -2rz	35	72	17	1.1	0.291	25.5	15.3	9500
6208-2z	40	80	18	1.1	0.371	32.5	19	9000
6208 -2rz	40	80	18	1.1	0.371	29	18	8500
6209-2z	45	85	19	1.1	0.429	35.1	21.6	8500
6209 -2rz	45	85	19	1.1	0.429	31	20.4	8000
6210-2z	50	90	20	1.1	0.466	37.1	23.2	8000
6210 -2rz	50	90	20	1.1	0.466	36.5	24	7500
6300-2z	10	35	11	0.6	0.043	8.52	3.4	26000
6300 -2rz	10	35	11	0.6	0.043	8.15	3.45	22000
6301-2z	12	37	12	1	0.06	10.1	4.15	22000
6301 -2rz	12	37	12	1	0.06	9.65	4.15	20000
6302-2z	15	42	13	1	0.08	11.9	5.4	19000
6302 -2rz	15	42	13	1	0.08	11.4	5.4	18000
6303-2z	17	47	14	1	0.11	14.3	6.55	17000
6303 -2rz	17	47	14	1	0.11	13.4	6.55	16000
6304-2z	20	52	15	1.1	0.15	16.8	7.8	15000
6304 -2rz	20	52	15	1.1	0.15	16	7.8	14000
6305-2z	25	62	17	1.1	0.23	23.4	11.6	13000
6305 -2rz	25	62	17	1.1	0.23	22.4	11.4	11000
6306-2z	30	72	19	1.1	0.35	29.6	16	11000
6306 -2rz	30	72	19	1.1	0.35	29	16.3	9500
6307-2z	35	80	21	1.5	0.47	35.1	19	9500
6307 -2rz								


*Customized bearings are supplied according to your requirements.

*The listed models and sizes are for reference only, for detailed specifications, please contact our sales department.

KEEP ROTATING, KEEP QUIET, KEEP MOVING

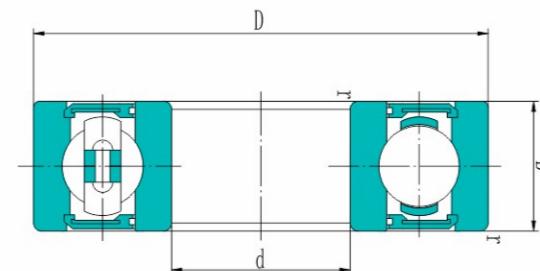

2RZ

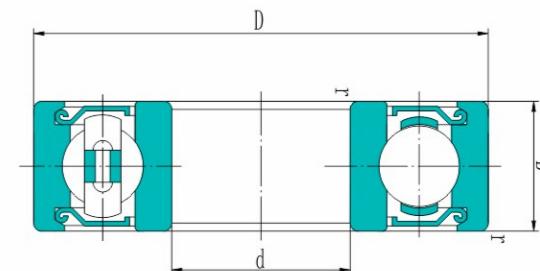


2Z

Model	Inner diameter	Outer diameter	Width	Chamfer	Weight	Load capacity		Limiting speed
	d [mm]	D [mm]	B [mm]	r [mm]	M [kg]	Dynamic [kN]	Static [kN]	
6307- 2rz	35	80	21	1.5	0.47	33.5	19	8500
6308-2z	40	90	23	1.5	0.64	42.3	24	8500
6308- 2rz	40	90	23	1.5	0.64	42.5	25	7500
6309-2z	45	100	25	1.5	0.84	55.3	31.5	7500
6309 -2rz	45	100	25	1.5	0.84	53	31.5	6700
6310-2z	50	110	27	2	1.1	65	38	6700
6310 -2rz	50	110	27	2	1.1	62	38	6000


*Customized bearings are supplied according to your requirements.

*The listed models and sizes are for reference only, for detailed specifications, please contact our sales department.

LOW NOISE HIGH PRECISION SERIES

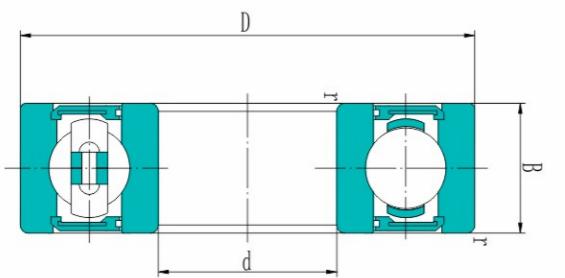

2RZ

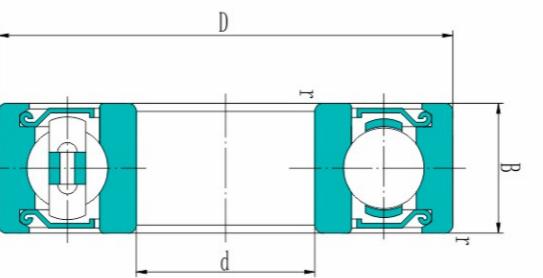

2Z


Model	Inner diameter	Outer diameter	Width	Load capacity		Available speed	
	d [mm]	D [mm]	B [mm]	Dynamic [kN]	Static [kN]	Lubrication rpm	Oil rpm
68/2.5-2Z	2.5	6	2.6	0.178	0.059	65000	76000
693-2Z	3	8	4	0.474	0.144	54000	63000
693/3-2rz	3	8	4	0.451	0.155	•	•
683-2Z	3	7	3	0.264	0.9	58000	68000
684-2Z	4	9	4	0.55	0.182	49000	57000
694-2Z	4	11	4	0.814	0.28	45000	52000
685-2Z	5	11	5	0.609	0.226	43000	51000
695-2Z	5	13	4	0.916	0.346	40000	47000
686-2Z	6	13	5	0.92	0.345	39000	46000
628/6-2rz	6	13	5	0.672	0.438	•	•
626-2Z	6	19	6	0.198	0.717	34000	40000
608-2Z	8	22	7	0.279	0.11	32000	37000

*Customized bearings are supplied according to your requirements.
*The listed models and sizes are for reference only, for detailed specifications, please contact our sales department.



PRODUCTION GUARANTEE FOR CUSTOMERS

Over the past 20 years, customer satisfaction has been our constant goal. Our engineers continually research and develop more efficient bearings, which also reduce customer end-use costs and make QIBR bearings the preferred choice of more and more customers.

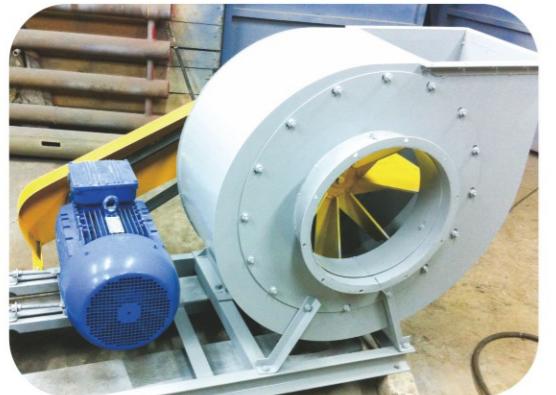

In March 2018, a Chinese fan manufacturer came to us due to problems with the previous parts supplier. Our technical staff confirmed the bearing's usage environment with the customer on site, recommended the customer to buy the QB7211E.T.P4S bearing, and instructed the customer how to install it properly. The customer highly appreciated our service and decided to establish a long-term cooperative relationship with us.



In June 2007, a Norwegian customer inquired about our angular contact ball bearings for washing machines. After confirming the bearing parameters, the customer requested 8 pcs of QHC7003 E.T.P4S samples for testing. Half a year later, we received feedback from the customer that our products passed the tests. Eventually the customer placed a large order with us and introduced our products to other manufacturers.



In February 2019, a hydraulic pumps manufacturer in Russia contacted us through an acquaintance. The client had previously used European brand bearings, after meeting and communicating with us, he learned that we supplied bearings to similar manufacturers, and quickly identified the requirements and took samples for testing. After 8 months of testing, our products met the client's requirements, and the client began to cooperate with us.



In July 2006, an Italian machine tool spindle manufacturer found us through the Internet. The customer was looking for a new supplier. We sent several models of angular contact ball bearings to the customer. After 10 months, the customer chose us as the supplier.



In August 2017, a Russian vacuum pump development company came to us, and our engineers recommended ceramic angular contact ball bearings to the customer based on their requirements, after the customer sent them to the final manufacturer. Our product passed the test after 5 months.



In November 2009, a CVT service factory in China asked us for angular contact ball bearings. We identified the customer's needs and recommended 3 types of high-speed angular contact ball bearings. The customer replaced them and gave us feedback that the end user was very satisfied with our quality.